

(19)



(11)

EP 0 840 482 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
25.04.2007 Bulletin 2007/17

(51) Int Cl.:
H04L 12/66 (2006.01) H04L 29/06 (2006.01)

(21) Application number: 97118649.9

(22) Date of filing: 27.10.1997

(54) **Communicating method between IPv4 terminal and IPv6 terminal and IPv4-IPv6 converting apparatus**

Kommunikationsverfahren zwischen einem IPv4 Endgerät und einem IPv6 Endgerät und IPv4-IPv6 Umsetzeinrichtung

Méthode de communication entre un terminal IPv4 et un terminal IPv6 et appareil de conversion IPv4-IPv6

(84) Designated Contracting States:
DE FR GB

(30) Priority: 01.11.1996 JP 29148096
07.08.1997 JP 21288997

(43) Date of publication of application:
06.05.1998 Bulletin 1998/19

(60) Divisional application:
06025235.0 / 1 773 013

(73) Proprietor: Hitachi, Ltd.
Chiyoda-ku,
Tokyo 101 (JP)

(72) Inventors:

- Tsuchiya, Kazuaki
Yokohama-shi (JP)
- Ikeda, Naoya
Ebina-shi (JP)
- Hamamoto, Shinichi
Yamato-shi (JP)
- Watanabe, Ken
Kawasaki-shi (JP)
- Yasue, Toshikazu
Chigasaki-shi (JP)

- Atarashi, Yoshifumi
Zama-shi (JP)
- Sumikawa, Munechika
Hadano-shi (JP)
- Miyamoto, Takahisa
Kawasaki-shi (JP)
- Higuchi, Hidemitsu
Yokohama-shi (JP)

(74) Representative: Strehl Schübel-Hopf & Partner
Maximilianstrasse 54
80538 München (DE)

(56) References cited:

- R. GILLIGAN & E. NORDMARK: "Transition Mechanisms for IPv6 Hosts and routers" NETWORK WORKING GROUP -RFC 1933- HTTP://DS.INTERNIC.NET/RFC/RFC1933.TXT, April 1996, pages 1-22, XP002056147
- HINDEN R M: "IP NEXT GENERATION OVERVIEW" COMMUNICATIONS OF THE ASSOCIATION FOR COMPUTING MACHINERY, vol. 39, no. 6, June 1996, pages 61-71, XP000641615
- BRITTON E G ET AL: "TCO/IP: THE NEXT GENERATION" IBM SYSTEMS JOURNAL, vol. 34, no. 3, 21 June 1995, pages 452-470, XP000529592

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 840 482 B1

Description

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a communicating method between an IPv4 terminal and an IPv6 terminal and to an IPv4-IPv6 converting apparatus. More particularly, the invention relates to method and apparatus for realizing a communication between an IPv4 terminal using IPv4 (Internet Protocol version 4) as a communication protocol and an IPv6 terminal using IPv6 (Internet Protocol version 6) as a communication protocol.

[0002] As a method of realizing a communication between an IPv4 terminal and an IPv6 terminal, there is a method of using an 'IPv4-mapped IPv6 address' and an 'IPv4-compatible IPv6 address' described in RFC (Request For Comments) 1884 issued by IETF (Internet Engineering Task Force).

[0003] The 'IPv4-mapped IPv6 address' is an IPv6 address in which "0" is set to the 127th to 48th bits among 128 bits of the IPv6 address, "1" is set to the 47th to 32nd bits, and an 'IPv4 address' is set to the 31st to 0th bits.

[0004] The 'IPv4-compatible IPv6 address' is an IPv6 address in which "0" is set to the 127th to 32nd bits among 128 bits of the IPv6 address and the 'IPv4 address' is set to the 31st to 0th bits.

[0005] When the communication between the IPv4 terminal and the IPv6 terminal is executed, an IPv4 address is preliminarily fixedly allocated to the IPv6 terminal which communicates with the IPv4 terminal. A packet converting apparatus is provided on the way of a path through which the IPv4 terminal and the IPv6 terminal communicate and a mutual conversion of IP headers of an IPv4 packet (RFC791) and an IPv6 packet (RFC1883) is performed.

[0006] In an IPv4 network, the IPv4 address of the IPv4 terminal and the IPv4 address allocated to the IPv6 terminal are used and a communication is executed by using the IPv4 packet. In an IPv6 network, the 'IPv4-mapped IPv6 address' in which the 'IPv4 address of the IPv4 terminal' has been set is used as an IPv6 address of the IPv4 terminal. In the IPv6 network, the 'IPv4-compatible IPv6 address' in which the 'IPv4 address allocated to the IPv6 terminal' has been set is used as an IP address of the IPv6 terminal and a communication is executed by using the IPv6 packet.

[0007] The packet converting apparatus converts the 'IPv4-mapped IPv6 address' included in the IPv6 packet into the 'IPv4 address of the IPv4 terminal' and converts the 'IPv4-compatible IPv6 address' to the 'IPv4 address allocated to the IPv6 terminal', thereby converting the IPv6 packet into the IPv4 packet. Contrarily, the 'IPv4 address of the IPv4 terminal' included in the IPv4 packet is converted into the 'IPv4-mapped IPv6 address' and the 'IPv4 address allocated to the IPv6 terminal' is converted into the 'IPv4-compatible IPv6 address', thereby converting the IPv4 packet into the IPv6 packet. Consequently, the communication between the IPv4 terminal

and the IPv6 terminal can be executed.

[0008] As a method of realizing the communication between the IPv4 terminal and the IPv6 terminal, IETF also proposed a method called a dual stack. According to the method, the IPv6 terminal has both of the communication protocols of IPv4 and IPv6. A communication is executed between the IPv6 terminals by using the IPv6 protocol. A communication is executed between the IPv4 terminals by using the IPv4 protocol. Thus, the communication between the IPv4 terminal and the IPv6 terminal can be executed.

[0009] IETF also proposed a method called an IP tunneling. This is a method such that when the IPv4 network exists on a communication path between two IPv6 terminals and a communication cannot be executed directly by the IPv6 packet, the IPv6 packet is encapsulated by the IPv4 header and is allowed to pass through the IPv4 network. Similarly, when the IPv6 network exists on a communication path between the IPv4 terminals and a communication cannot be executed directly by the IPv4 packet, the IPv4 packet is encapsulated by the IPv6 header and is allowed to pass through the IPv6 network. Consequently, even when there is the IPv4 network on the communication path, the communication between the IPv6 terminals can be executed. Even when there is the IPv6 network on the communication path, the communication between the IPv4 terminals can be executed.

[0010] According to the method, the communication between the IPv4 terminal and the IPv6 terminal can be realized by a simple operation of adding a fixed pattern of 96 bits to the IPv4 address or deleting the fixed pattern of 96 bits from the IPv6 address.

[0011] According to the method called a dual stack, by selectively using the communication protocols of IPv4 and IPv6 in accordance with a communication partner, the communication between the IPv4 terminal and the IPv6 terminal can be realized.

[0012] According to the method called an IP tunneling, by encapsulating the packet by the header of the relevant communication protocol and passing the resultant data through the network existing on the communication path between the two terminals, the communication between the two terminals can be realized.

SUMMARY OF THE INVENTION

[0013] The convention techniques, however, have the following problems.

[0014] A first problem is that the IPv4 address has to be fixedly allocated to all of the IPv6 terminals which have a possibility of communication with the IPv4 terminal. This further consumes the IPv4 address which is short and accelerates its shortage.

[0015] A second problem is that since mutual domain information (for example, an IP address corresponding to a domain name) cannot be referred to between the IPv4 network and the IPv6 network, the partner can be designated not by the domain name but by only an actual

IP address. This results in that the communication partners have to be mutually aware whether the partner uses IPv4 or IPv6 as a communication protocol.

[0016] A third problem is that, in the method called a dual stack, the IPv4 protocol is provided for all of the IPv6 terminals having the possibility of communication with the IPv4 terminal and the IPv4 address has to be fixedly allocated. This results in that a larger memory capacity is necessary as compared with that in case of providing only the IPv6 protocol and, in a manner similar to the first problem, the IPv4 address which is short is further consumed and the shortage is accelerated.

[0017] A fourth problem is that, in the method called an IP tunneling, when the IPv4 network exists on the communication path between the two IPv6 terminals, in order to pass the IPv6 packet by encapsulating it by the IPv4 header, a setting for it has to be preliminarily performed. Similarly, when the IPv6 network exists on the communication path between the two IPv4 terminals, in order to pass the IPv4 packet by encapsulating it by the IPv6 header, a setting for it has to be preliminarily performed. The method can be used only between the terminals in which the setting of the IP tunneling has preliminarily been performed. The communication cannot be executed between the terminals in which the setting is not preliminarily performed.

[0018] It is, therefore, an object of the invention to provide method and apparatus in which only an IPv6 protocol is provided for an IPv6 terminal, even if an IPv4 address is not preliminarily fixedly allocated, a communication between an IPv4 terminal and the IPv6 terminal can be executed, a partner is designated not by an IP address but by a domain name, and the communication between the IPv4 terminal and the IPv6 terminal can be executed.

[0019] According to the first aspect, in a communication network system comprising an IPv4 network, an IPv6 network, and an IPv4-IPv6 converting apparatus connected to both of them, an IPv4 terminal of the IPv4 network inquires an IP address for a domain name of an IPv6 terminal of the IPv6 network to the IPv4-IPv6 converting apparatus. Thus, the IPv4-IPv6 converting apparatus obtains the IPv6 address corresponding to the domain name from a DNS (Domain Name System) v6 server apparatus for managing domain information of the IPv6 network, dynamically acquires the IPv4 address corresponding to the IPv6 address from a DHCP (Dynamic Host Configuration Protocol) v4 server apparatus for dynamically allocating the IPv4 address, and notifies to the IPv4 terminal. The IPv4 terminal forms an IPv4 packet by setting an own IPv4 address to an IPv4 source address and by setting the notified IPv4 address to an IPv4 destination address and sends the IPv4 packet to the IPv4-IPv6 converting apparatus. The IPv4-IPv6 converting apparatus converts the IPv4 source address included in the received IPv4 packet into an IPv6 source address by adding fixed data to the IPv4 source address and converts an IPv4 destination address included in the IPv4 packet into the IPv6 address corresponding to the IPv4 destina-

tion address, thereby obtaining an IPv6 destination address, forming an IPv6 packet from the IPv4 packet, and sending the IPv6 packet to the IPv6 network. The IPv6 terminal forms the IPv6 packet by setting the own IPv6 address to the IPv6 source address and setting the IPv6 source address included in the received IPv6 packet to the IPv6 destination address, and transmits the IPv6 packet to the IPv4-IPv6 converting apparatus. The IPv4-IPv6 converting apparatus deletes the fixed data from the IPv6 destination address included in the received IPv6 packet, converts the resultant IPv6 destination address to the IPv4 destination address, and converts the IPv6 source address included in the IPv6 packet to the IPv4 address corresponding to the IPv6 source address, thereby obtaining the IPv4 source address, forming the IPv4 packet from the IPv6 packet, and transmitting the IPv4 packet to the IPv4 network.

[0020] In the communicating method between the IPv4 terminal and the IPv6 terminal according to the first aspect, when the communication from the IPv4 terminal side of the IPv4 network to the IPv6 terminal of the IPv6 network is started, the IPv4 address is dynamically allocated to the IPv6 terminal of the IPv6 network. Consequently, it is unnecessary to preliminarily fixedly allocate the IPv4 address to the IPv6 terminal, so that the consumption of the IPv4 address can be suppressed. Since the IPv4-IPv6 converting apparatus automatically obtains the IP address for the domain name of the IPv6 terminal from the DNSv6 server apparatus, the IPv4 terminal can designate the domain name and communicate with the IPv6 terminal.

[0021] According to the second aspect, in a communication network system comprising an IPv4 network, an IPv6 network, and an IPv4-IPv6 converting apparatus connected to both of them, an IPv6 terminal of the IPv6 network inquires an IP address for a domain name of an IPv4 terminal of the IPv4 network to the IPv4-IPv6 converting apparatus. Thus, the IPv4-IPv6 converting apparatus acquires an IPv4 address corresponding to the domain name from a DNSv4 server apparatus for managing domain information of the IPv4 network, converts the IPv4 address to the IPv6 address by adding fixed data to the IPv4 address, and notifies the IPv6 terminal of the IPv6 address. The IPv6 terminal forms an IPv6 packet by setting an own IPv6 address to an IPv6 source address and setting the notified IPv6 address to an IPv6 destination address and transmits the IPv6 packet to the IPv4-IPv6 converting apparatus. The IPv4-IPv6 converting apparatus deletes the fixed data from the IPv6 destination address included in the received IPv6 packet and converts the resultant IPv6 destination address to an IPv4 destination address, dynamically acquires the IPv4 address corresponding to the IPv6 source address included in the IPv6 packet from a DHCPv4 server apparatus for dynamically allocating the IPv4 address, forms the IPv4 packet from the IPv6 packet by using the IPv4 address, and transmits the IPv4 packet to the IPv4 network. The IPv4 terminal forms the IPv4 packet by setting the own

IPv4 address to an IPv4 source address and setting the IPv4 source address included in the received IPv4 packet to an IPv4 destination address and transmits the IPv4 packet to the IPv4-IPv6 converting apparatus. The IPv4-IPv6 converting apparatus converts the IPv4 source address to the IPv6 source address by adding fixed data to the IPv4 source address, obtains the IPv6 destination address by converting the IPv4 destination address included in the IPv4 packet to the IPv6 address corresponding to the IPv4 destination address, forms the IPv6 packet from the IPv4 packet, and transmits the IPv6 packet to the IPv6 network.

[0022] In the communicating method between the IPv4 terminal and the IPv6 terminal according to the second aspect, when the communication from the IPv6 terminal side of the IPv6 network to the IPv4 terminal of the IPv4 network is started, the IPv4 address is dynamically allocated to the IPv6 terminal of the IPv6 network. Consequently, it is unnecessary to preliminarily fixedly allocate the IPv4 address to the IPv6 terminal, so that the consumption of the IPv4 address can be suppressed. Since the IPv4-IPv6 converting apparatus automatically obtains the IP address for the domain name of the IPv4 terminal from the DNSv4 server apparatus, the IPv6 terminal can designate the domain name and communicate with the IPv4 terminal.

BRIEF DESCRIPTION OF THE DRAWINGS

[0023]

Fig. 1 is a constructional diagram of an IPv4-IPv6 converting apparatus according to the first embodiment of the invention;

Fig. 2 is a constructional diagram of an IP address conversion table;

Fig. 3 is a constructional diagram of a communication network system according to the first embodiment of the invention;

Fig. 4 is a flowchart in case of starting a communication from an IPv4 terminal to an IPv6 terminal through the IPv4-IPv6 converting apparatus according to the first embodiment of the invention;

Fig. 5 is a flowchart which is continuous to Fig. 4;

Fig. 6 is a flowchart in case of starting a communication from the IPv6 terminal to the IPv4 terminal through the IPv4-IPv6 converting apparatus according to the first embodiment of the invention;

Fig. 7 is a flowchart which is continuous to Fig. 6;

Fig. 8 is a flowchart in another case of starting a communication from the IPv6 terminal to the IPv4 terminal;

Fig. 9 is a flowchart which is continuous to Fig. 8;

Fig. 10 is a constructional diagram of another IPv4-IPv6 converting apparatus;

Fig. 11 is a constructional diagram of another network system;

Fig. 12 is a flowchart in another case of starting a

communication from the IPv4 terminal to the IPv6 terminal;

Fig. 13 is a flowchart which is continuous to Fig. 12;

Fig. 14 is a flowchart in still another case of starting a communication from the IPv6 terminal to the IPv4 terminal;

Fig. 15 is a flowchart which is continuous to Fig. 14;

Fig. 16 is a constructional diagram of an IPv4-IPv6 converting apparatus according to the second embodiment of the invention;

Fig. 17 is a constructional diagram of an IPv4-IPv6 converting apparatus according to the third embodiment of the invention;

Fig. 18 is a constructional diagram of an IPv4-IPv6 converting apparatus according to the fourth embodiment of the invention;

Fig. 19 is a constructional diagram of a communication network system according to the fifth embodiment of the invention;

Fig. 20 is a flowchart in case of communicating between the IPv6 terminals through the IPv4-IPv6 converting apparatus according to the fifth embodiment of the invention; and

Fig. 21 is a flowchart which is continuous to Fig. 20.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0024] Embodiments of the present invention will now be described hereinbelow with reference to the drawings.

(A) First embodiment

[0025] Fig. 1 is a constructional diagram of an IPv4-IPv6 converting apparatus 1a according to the first embodiment of the invention.

[0026] The IPv4-IPv6 converting apparatus 1a is located between an IPv4 network and an IPv6 network and realizes a communication between an IPv4 terminal and an IPv6 terminal by performing an IP header conversion of an IPv4 packet and an IPv6 packet. The IPv4-IPv6 converting apparatus 1a comprises IP transmitting and receiving means 10, IP header converting means 11, DNS substituting means 13, IPv4 address capturing means 14, and IP address conversion information holding means 15.

[0027] The IP transmitting and receiving means 10 is means for transmitting and receiving the IPv4 packet and IPv6 packet between the IPv4 network and the IPv6 network and is constructed by, for example, electronic devices such as CPU, RAM, and the like.

[0028] The IP header converting means 11 is means for performing an IP header conversion of the IPv4 packet and the IPv6 packet and is constructed by, for example, electronic devices such as CPU, RAM, and the like.

[0029] The DNS substituting means 13 is means for capturing domain information from a DNS server in the IPv4 network or a DNS server in the IPv6 network in accordance with the DNS technique disclosed in

RFC1034, RFC1886, or the like and is constructed by, for example, electronic devices such as CPU, RAM, and the like.

[0030] The IPv4 address capturing means 14 is means for capturing an IPv4 address from a DHCP server in the IPv4 network in accordance with the DHCP technique disclosed in RFC1541 or the like and is constructed by, for example, electronic devices such as CPU, RAM, and the like.

[0031] The IP address conversion information holding means 15 is means for converting the IPv4 address and the IPv6 address and is constructed by, for example, electronic devices such as an RAM and the like. A correspondence between the IPv4 address and the IPv6 address is held as an IP address conversion table 151.

[0032] Fig. 2 is a constructional diagram of the IP address conversion table 151. IPv6 addresses of the IPv6 terminal communicating with the IPv4 terminal and IPv4 addresses which are dynamically allocated in correspondence to them have been registered in the IP address conversion table 151.

[0033] Fig. 3 is a diagram of a communication network system 100 connecting an IPv4 network 104 and an IPv6 network 106 through the IPv4-IPv6 converting apparatus 1a.

[0034] In addition to an IPv4 terminal 2, a DNSv4 server 3 for managing domain information in the IPv4 network 104 and a DHCPv4 server 4 for dynamically allocating the IPv4 addresses to terminals in the IPv4 network 104 are connected to the IPv4 network 104.

[0035] In addition to an IPv6 terminal 5, a DNSv6 server 6 for managing domain information in the IPv6 network is connected to the IPv6 network 106.

[0036] It is now assumed that "133. 144. 95. 101" has been allocated as an IPv4 address to the IPv4 terminal 2 and "1::1" has been allocated as an IPv6 address to the IPv6 terminal 5. It is also assumed that 100 IPv4 addresses of "133. 144. 95. 1" to "133. 144. 95. 100" have been pooled in the DHCPv4 server 4. It is also assumed that the IPv4-IPv6 converting apparatus 1a has been set as a DNS server into the IPv4 terminal 2 and IPv6 terminal 5. Further, it is assumed that the DNSv4 server 3 and DNSv6 server 6 have been set as DNS servers and the DHCPv4 server 4 has been set as a DHCP server into the IPv4-IPv6 converting apparatus 1a.

[0037] In Fig. 3, although the IPv4 network 104 and IPv6 network 106 are perfectly separated, a similar construction is also applied to a case where the IPv4 network and IPv6 network physically mixedly exist in the same network.

[0038] Figs. 4 and 5 are flowcharts of the operation in case of starting a communication from the IPv4 terminal 2 to the IPv6 terminal 5.

[0039] Although the IPv4 terminal 2 knows a domain name of the IPv6 terminal 5, it doesn't know an IP address. As shown in Fig. 4, therefore, after the IPv4 terminal 2 transmitted an inquiry message (hereinafter, called a 'message A') of the IP address corresponding

to the domain name of the IPv6 terminal 5 to the IPv4-IPv6 converting apparatus 1a via the IPv4 network 104, it waits for a response for a predetermined time.

[0040] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a receives and processes the message A and sends it to the DNS substituting means 13. The DNS substituting means 13 instructs the IP transmitting and receiving means 10 so as to transfer the message A to the DNSv4 server 3, sends the message A thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transfers the message A to the DNSv4 server 3 via the IPv4 network.

[0041] The DNSv4 server 3 which received the message A retrieves the domain information of the IPv6 terminal 5. When it is not registered, however, a response to the message A is not returned.

[0042] The DNS substituting means 13 which didn't receive the response from the DNSv4 server 3 even after the elapse of a predetermined time instructs the IP transmitting and receiving means 10 so as to transfer the message A to the DNSv6 server 6, sends the message A thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transfers the message A to the DNSv6 server 6 via the IPv6 network.

[0043] The DNSv6 server 6 which received the message A retrieves the domain information of the IPv6 terminal 5 and returns the registered domain information of the IPv6 terminal 5 to the IPv4-IPv6 converting apparatus 1a as a response message (hereinafter, referred to as a 'message B') for the message A.

[0044] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a which received the response from the DNSv6 server 6 within the predetermined time sends the received message B to the DNS substituting means 13. The DNS substituting means 13 obtains the IPv6 address (1::1) corresponding to the domain name of the IPv6 terminal 5 from the message B and sends it to the IP address conversion information holding means 15. The IP address conversion information holding means 15 retrieves the IP address conversion table 151 by using the IPv6 address (1::1) of the IPv6 terminal 5 as a key. If the relevant entry has been registered, the IPv4 address of the entry is returned to the DNS substituting means 13. On the other hand, when the relevant entry is not registered yet, such a fact is notified to the DNS substituting means 13.

[0045] The DNS substituting means 13 which received the IPv4 address from the IP address conversion information holding means 15 forms a message (hereinafter, referred to as a 'message E') to notify of the IPv4 address as an IPv4 address corresponding to the domain name of the IPv6 terminal 5 and sends it to the IP transmitting and receiving means 10. The IP transmitting and receiving means 10 transmits the message E to the IPv4 terminal 2 via the IPv4 network.

[0046] On the other hand, the DNS substituting means

13 which received the notification indicating that the entry is not registered yet from the IP address conversion information holding means 15 instructs the IPv4 address capturing means 14 so as to capture the IPv4 address and, after that, waits for a response for a predetermined time. The IPv4 address capturing means 14 forms an IPv4 address capturing message (hereinafter, called a 'message C'), instructs the IP transmitting and receiving means 10 so as to transfer the message C to the DHCPv4 server 4, sends the message C thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transmits the message C to the DHCPv4 server 4 via the IPv4 network.

[0047] The DHCPv4 server 4 which received the message C gives the IPv4 address to the IPv6 address (1 : : 1) of the IPv6 terminal 5 (it is now assumed that "133. 144. 95. 1" has been given) and returns an IPv4 address given message (hereinafter, called a 'message D').

[0048] The IP transmitting and receiving means 10 which received the message D sends the message D to the IPv4 address capturing means 14. The IPv4 address capturing means 14 obtains the IPv4 address (133. 144. 95. 1) from the message D and notifies the DNS substituting means 13. The DNS substituting means 13 forms the message E to notify of the IPv4 address (133. 144. 95. 1) as an IP address corresponding to the domain name of the IPv6 terminal 5 and sends it to the IP transmitting and receiving means 10. The IP transmitting and receiving means 10 transmits the message E to the IPv4 terminal 2 via the IPv4 network. The DNS substituting means 13 sends the IPv4 address (133. 144. 95. 1) captured from the DHCPv4 server 4 to the IP address conversion information holding means 15 in correspondence to the IPv6 address (1 : : 1) of the IPv6 terminal 5. The IP address conversion information holding means 15 forms a new entry into the IP address conversion table 151 and registers a correspondence of the IPv4 address (133. 144. 95. 1) and the IPv6 address (1 : : 1) of the IPv6 terminal 5. The entry of the IP address conversion table 151 is deleted in the case where it is not referred for a predetermined time. The IPv4 address (133. 144. 95. 1) is returned to the DHCPv4 server 4.

[0049] As shown in Fig. 5, the IPv4 terminal 2 transmits the IPv4 packet in which the IPv4 address (133. 144. 95. 1) notified from the IPv4-IPv6 converting apparatus 1a by the message E has been set into an IPv4 destination address field of the IPv4 packet and an own IPv4 address (133. 144. 95. 101) has been set into an IPv4 source address field to the IPv4-IPv6 converting apparatus 1a through the IPv4 network.

[0050] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a sends the received IPv4 packet to the IP header converting means 11. The IP header converting means 11 extracts the IPv4 address (133. 144. 95. 101) from the IPv4 source address field of the IPv4 packet, converts the IPv4 address into an 'IPv4-mapped IPv6 address' (: : FFFF : 133. 144. 95. 101) of 128 bits by adding a fixed pattern of 96 bits men-

tioned above to the IPv4 address, and sets it into an IPv6 source address field of the IPv6 packet. The IP header converting means 11 extracts the IPv4 address (133. 144. 95. 1) from the IPv4 destination address field of the IPv4 packet and sends it to the IP address conversion information holding means 15. The IP address conversion information holding means 15 obtains the IPv6 address (1 : : 1) corresponding to the IPv4 address (133. 144. 95. 1) with reference to the IP address conversion table 151 and sends it to the IP header converting means 11. The IP header converting means 11 sets the IPv6 address (1 : : 1) into an IPv6 destination address field of the IPv6 packet. The IPv6 packet formed by performing the IP header conversion as mentioned above is sent to the IP transmitting and receiving means 10. The IP transmitting and receiving means 10 transmits the IPv6 packet to the IPv6 terminal 5 through the IPv6 network.

[0051] In this manner, the communication from the IPv4 terminal 2 to the IPv6 terminal 5 can be started.

[0052] Figs. 6 and 7 are flowcharts for the operation in case of starting a communication from the IPv6 terminal 5 to the IPv4 terminal 2.

[0053] Although the IPv6 terminal 5 knows a domain name of the IPv4 terminal 2, it doesn't know the IP address. As shown in Fig. 6, therefore, the IPv6 terminal 5 transmits an inquiry message (hereinafter, called a 'message K') of an IP address corresponding to the domain name of the IPv4 terminal 2 to the IPv4-IPv6 converting apparatus 1a via the IPv6 network 106 and, after that, waits for a response for a predetermined time.

[0054] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a receives and processes the message K and sends it to the DNS substituting means 13. The DNS substituting means 13 instructs the IP transmitting and receiving means 10 so as to transfer the message K to the DNSv6 server 6, sends the message K thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transfers the message K to the DNSv6 server 6 via the IPv6 network.

[0055] The DNSv6 server 6 which received the message K retrieves the domain information of the IPv4 terminal 2. However, when it is not registered, a response to the message K is not returned.

[0056] The DNS substituting means 13 which didn't receive the response from the DNSv6 server 6 even after the elapse of a predetermined time instructs the IP transmitting and receiving means 10 so as to transfer the message K to the DNSv4 server 3, sends the message K thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transfers the message K to the DNSv4 server 3 via the IPv4 network.

[0057] The DNSv4 server 3 which received the message K retrieves the domain information of the IPv4 terminal 2 and returns the registered domain information of the IPv4 terminal 2 to the IPv4-IPv6 converting apparatus 1a as a response message (hereinafter, called a 'mes-

sage L') for the message K.

[0058] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a which received the response from the DNSv4 server 3 within the predetermined time sends the received message L to the DNS substituting means 13. The DNS substituting means 13 obtains the IPv4 address (133. 144. 95. 101) corresponding to the domain name of the IPv4 terminal 2 from the message L.

[0059] Subsequently, the DNS substituting means 13 sends the IPv6 address (1 :: 1) of the IPv6 terminal 5 to the IP address conversion information holding means 15. The IP address conversion information holding means 15 retrieves the IP address conversion table 151 by using the IPv6 address (1 :: 1) of the IPv6 terminal 5 as a key and notifies the DNS substituting means 13 of information about whether the relevant entry has been registered or not.

[0060] The DNS substituting means 13 which received a notification indicating that the relevant entry is not registered yet in the IPv6 address (1 :: 1) of the IPv6 terminal 5 instructs the IPv4 address capturing means 14 so as to capture the IPv4 address and, after that, waits for a response for a predetermined time. The IPv4 address capturing means 14 forms an IPv4 address capture message (hereinafter, called a 'message M'), instructs the IP transmitting and receiving means 10 so as to transfer the message M to the DHCPv4 server 4, sends the message M thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transmits the message M to the DHCPv4 server 4 via the IPv4 network.

[0061] The DHCPv4 server 4 which received the message M gives the IPv4 address to the IPv6 address (1 :: 1) of the IPv6 terminal 5 (it is now assumed that "133. 144. 95. 1" is given) and returns an IPv4 address given message (hereinafter, called a 'message N').

[0062] The IP transmitting and receiving means 10 which received the message N sends the message N to the IPv4 address capturing means 14. The IPv4 address capturing means 14 obtains the IPv4 address (133. 144. 95. 1) from the message N and notifies the DNS substituting means 13. The DNS substituting means 13 sends the IPv4 address (133. 144. 95. 1) captured from the DHCPv4 server 4 to the IP address conversion information holding means 15 in correspondence to the IPv6 address (1 :: 1) of the IPv6 terminal 5. The IP address conversion information holding means 15 forms a new entry into the IP address conversion table 151 and registers a correspondence of the IPv4 address (133. 144. 95. 1) and the IPv6 address (1 :: 1) of the IPv6 terminal 5. The entry in the IP address conversion table 151 is deleted when it is not referred to for a predetermined time and the IPv4 address (133. 144. 95. 1) is returned to the DHCPv4 server 4.

[0063] When a notification indicating that the relevant entry has been registered in the IPv6 address (1 :: 1) of the IPv6 terminal 5 is received or when the registration

of the relevant entry into the IPv6 address (1 :: 1) of the IPv6 terminal 5 is completed, the DNS substituting means 13 forms a message (hereinafter, called a 'message P') to notify of an 'IPv4-mapped IPv6 address' (:: FFFF : 133. 144. 95. 101) in which the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2 has been set as an IP address corresponding to the domain name of the IPv4 terminal 2. The DNS substituting means 13 instructs the IP transmitting and receiving means 10 so as to transfer the message P to the IPv6 terminal 5 and sends the message P thereto. The IP transmitting and receiving means 10 transmits the message P to the IPv6 terminal 5 via the IPv6 network.

[0064] As shown in Fig. 7, the IPv6 terminal 5 transmits the IPv6 packet in which the IPv6 address (:: FFFF : 133. 144. 95. 101) notified from the IPv4-IPv6 converting apparatus 1a has been set into the IPv6 destination address field of the IPv6 packet and the own IPv6 address (1 :: 1) has been set into the IPv6 source address field to the IPv4-IPv6 converting apparatus 1a through the IPv6 network.

[0065] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a sends the received IPv6 packet to the IP header converting means 11. The IP header converting means 11 extracts the IPv6 address (:: FFFF : 133. 144. 95. 101) from the IPv6 destination address field of the IPv6 packet, converts the IPv6 address into the IPv4 address (133. 144. 95. 101) of 32 bits by deleting the fixed pattern of 96 bits mentioned above, and sets the IPv4 address into the IPv4 destination address field of the IPv4 packet. The IP header converting means 11 extracts the IPv6 address (1 :: 1) from the IPv6 source address field of the IPv6 packet and sends it to the IP address conversion information holding means 15. The IP address conversion information holding means 15 obtains the IPv4 address (133. 144. 95. 1) corresponding to the IPv6 address (1 :: 1) with reference to the IP address conversion table 151 and sends it to the IP header converting means 11. The IP header converting means 11 sets the IPv4 address (133. 144. 95. 1) into the IPv4 source address field of the IPv4 packet. The IPv4 packet formed by performing the IP header conversion as mentioned above is sent to the IP transmitting and receiving means 10. The IP transmitting and receiving means 10 transmits the IPv4 packet to the IPv4 terminal 2 through the IPv4 network.

[0066] In this manner, the communication from the IPv6 terminal 5 to the IPv4 terminal 2 can be started.

[0067] Although the case where the IPv4 domain information had been registered in the DNSv4 server 3 has been described above, the IPv4 domain information can be also registered in the DNSv6 server 6. In this case, the IPv4-IPv6 converting apparatus 1a captures the IPv4 domain information by communicating with the DNSv6 server 6 by using the IPv6 protocol. Similarly, the IPv6 domain information can be also registered in the DNSv4 server 3. In this case, the IPv4-IPv6 converting apparatus 1a captures the IPv6 domain information by communi-

cating with the DNSv4 server 3 by using the IPv4 protocol.

[0068] Explanation has been made with respect to the case where the address conversion is performed solely in the address field by adding or deleting the fixed pattern of 96 bits mentioned above or by referring to the IP address conversion table 151. As for the address on the terminal side which started the communication, however, a combination of the address on the terminal side which started the communication and the port number of a TCP (Transmission Control Protocol)/UDP (User Datagram Protocol) can be also converted to a combination of an address of the IPv4-IPv6 converting apparatus and a port number of the TCP/UDP by using a method called an IP masquerade.

[0069] Figs. 8 and 9 are flowcharts for operation in another case of starting a communication from the IPv6 terminal 5 to the IPv4 terminal 2. This case has a feature in that temporary allocation of IPv4 address to the IPv6 terminal is performed at the time of actually starting a data communication.

[0070] Although the IPv6 terminal 5 knows a domain name of the IPv4 terminal 2, it doesn't know the IP address. As shown in Fig. 8, therefore, the IPv6 terminal 5 transmits an inquiry message (hereinafter, called a 'message K') of an IP address corresponding to the domain name of the IPv4 terminal 2 to the IPv4-IPv6 converting apparatus 1a via the IPv6 network 106 and, after that, waits for a response for a predetermined time.

[0071] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a receives and processes the message K and sends it to the DNS substituting means 13. The DNS substituting means 13 instructs the IP transmitting and receiving means 10 so as to transfer the message K to the DNSv6 server 6, sends the message K thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transfers the message K to the DNSv6 server 6 via the IPv6 network.

[0072] The DNSv6 server 6 which received the message K retrieves the domain information of the IPv4 terminal 2. However, when it is not registered, a response to the message K is not returned.

[0073] The DNS substituting means 13 which didn't receive the response from the DNSv6 server 6 even after the elapse of a predetermined time instructs the IP transmitting and receiving means 10 so as to transfer the message K to the DNSv4 server 3, sends the message K thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transfers the message K to the DNSv4 server 3 via the IPv4 network.

[0074] The DNSv4 server 3 which received the message K retrieves the domain information of the IPv4 terminal 2 and returns the registered domain information of the IPv4 terminal 2 to the IPv4-IPv6 converting apparatus 1a as a response message (hereinafter, called a 'message L') for the message K.

[0075] The IP transmitting and receiving means 10 of

the IPv4-IPv6 converting apparatus 1a which received the response from the DNSv4 server 3 within the predetermined time sends the received message L to the DNS substituting means 13. The DNS substituting means 13 obtains the IPv4 address (133. 144. 95. 101) corresponding to the domain name of the IPv4 terminal 2 from the message L.

[0076] The DNS substituting means 13 forms a message (hereinafter, called a 'message P') to notify of an 'IPv4-mapped IPv6 address' (:: FFFF : 133. 144. 95. 101) in which the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2 has been set as an IP address corresponding to the domain name of the IPv4 terminal 2. The DNS substituting means 13 instructs the IP transmitting and receiving means 10 so as to transfer the message P to the IPv6 terminal 5 and sends the message P thereto. The IP transmitting and receiving means 10 transmits the message P to the IPv6 terminal 5 via the IPv6 network.

[0077] As shown in Fig. 9, the IPv6 terminal 5 transmits the IPv6 packet in which the IPv6 address (:: FFFF : 133. 144. 95. 101) notified from the IPv4-IPv6 converting apparatus 1a has been set into the IPv6 destination address field of the IPv6 packet and the own IPv6 address (1 :: 1) has been set into the IPv6 source address field to the IPv4-IPv6 converting apparatus 1a through the IPv6 network.

[0078] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a sends the received IPv6 packet to the IP header converting means 11. The IP header converting means 11 extracts the IPv6 address (:: FFFF : 133. 144. 95. 101) from the IPv6 destination address field of the IPv6 packet, converts the IPv6 address into the IPv4 address (133. 144. 95. 101) of 32 bits by deleting the fixed pattern of 96 bits mentioned above, and sets the IPv4 address into the IPv4 destination address field of the IPv4 packet. The IP header converting means 11 extracts the IPv6 address (1 :: 1) from the IPv6 source address field of the IPv6 packet and sends it to the IP address conversion information holding means 15.

[0079] The IP address conversion information holding means 15 retrieves the IP address conversion table 151 by using the IPv6 address (1 :: 1) of the IPv6 terminal 5 as a key and notifies the IP header converting means 11 of a result indicating whether the relevant entry has been registered or not.

[0080] The IP header converting means 11 which received the notification that the relevant entry is not registered yet in the IPv6 address (1 :: 1) of the IPv6 terminal 5 instructs the IPv4 address capturing means 14 so as to capture the IPv4 address and, after that, waits for a reply for a predetermined time. The IPv4 address capturing means 14 forms an IPv4 address capturing message (hereinafter, referred to as a "message M"), instructs the IP transmitting and receiving means 10 so as to transfer the message M to the DHCPv4 server 4, supplies the message M thereto, and after that, waits for a reply for a predetermined time. The IP transmitting and

receiving means 10 transmits the message M to the DHCPv4 server 4 via the IPv4 network.

[0081] The DHCPv4 server 4 which received the message M gives the IPv4 address to the IPv6 address (1 :: 1) of the IPv6 terminal 5 (it is now assumed that 133. 144. 95. 1 was given) and returns an IPv4 address given message (hereinafter, referred to as a "message N").

[0082] The IP transmitting and receiving means 10 which received the message N transmits the message N to the IPv4 address capturing means 14. The IPv4 address capturing means 14 obtains the IPv4 address (133. 144. 95. 1) from the message N and notifies the IP header converting means 11. The IP header converting means 11 transmits the IPv4 address (133. 144. 95. 1) captured from the DHCPv4 server 4 to the IP address conversion information holding means 15 so as to correspond to the IPv6 address (1 :: 1) of the IPv6 terminal 5. The IP address conversion information holding means 15 forms a new entry into the IP address conversion table 151 and registers the correspondence between the IPv4 address (133. 144. 95. 1) and the IPv6 address (1 :: 1) of the IPv6 terminal 5. The entry of the IP address conversion table 151 is deleted when it is not referred to for a predetermined time. The IPv4 address (133. 144. 95. 1) is returned to the DHCPv4 server 4.

[0083] When a notification that the corresponding entry has been registered in the IPv6 address (1 :: 1) of the IPv6 terminal 5 is received or when the registration of the corresponding entry into the IPv6 address (1 :: 1) of the IPv6 terminal 5 is completed, the IP header converting means 11 sets the IPv4 address (133. 144. 95. 1) into the IPv4 source address field of the IPv4 packet. The IPv4 packet formed by performing the IP header conversion as mentioned above is sent to the IP transmitting and receiving means 10. The IP transmitting and receiving means 10 transmits the IPv4 packet to the IPv4 terminal 2 through the IPv4 network.

[0084] In this manner, the communication from the IPv6 terminal 5 to the IPv4 terminal 2 can be started.

[0085] Figs. 12 and 13 are flowcharts for operation in another case of starting a communication from the IPv4 terminal 2 to the IPv6 terminal 5. This case has a feature in that "IPv4-mapped IPv6 address" is not used.

[0086] Although the IPv4 terminal 2 knows a domain name of the IPv6 terminal 5, it doesn't know an IP address. As shown in Fig. 12, therefore, after the IPv4 terminal 2 transmitted an inquiry message (hereinafter, called a 'message A') of the IP address corresponding to the domain name of the IPv6 terminal 5 to the IPv4-IPv6 converting apparatus 1a via the IPv4 network 104, it waits for a response for a predetermined time.

[0087] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a receives and processes the message A and sends it to the DNS substituting means 13. The DNS substituting means 13 instructs the IP transmitting and receiving means 10 so as to transfer the message A to the DNSv4 server 3, sends the message A thereto, and after that, waits for a response for a

predetermined time. The IP transmitting and receiving means 10 transfers the message A to the DNSv4 server 3 via the IPv4 network.

[0088] The DNSv4 server 3 which received the message A retrieves the domain information of the IPv6 terminal 5. When it is not registered, however, a response to the message A is not returned.

[0089] The DNS substituting means 13 which didn't receive the response from the DNSv4 server 3 even after the elapse of a predetermined time instructs the IP transmitting and receiving means 10 so as to transfer the message A to the DNSv6 server 6, sends the message A thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transfers the message A to the DNSv6 server 6 via the IPv6 network.

[0090] The DNSv6 server 6 which received the message A retrieves the domain information of the IPv6 terminal 5 and returns the registered domain information of the IPv6 terminal 5 to the IPv4-IPv6 converting apparatus 1a as a response message (hereinafter, referred to as a 'message B') for the message A.

[0091] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a which received the response from the DNSv6 server 6 within the predetermined time sends the received message B to the DNS substituting means 13. The DNS substituting means 13 obtains the IPv6 address (1 :: 1) corresponding to the domain name of the IPv6 terminal 5 from the message B and sends it to the IP address conversion information holding means 15. The IP address conversion information holding means 15 retrieves the IP address conversion table 151 by using the IPv6 address (1 :: 1) of the IPv6 terminal 5 as a key. If the relevant entry has been registered, the IPv4 address of the entry is returned to the DNS substituting means 13. On the other hand, when the relevant entry is not registered yet, such a fact is notified to the DNS substituting means 13.

[0092] The DNS substituting means 13 which received the IPv4 address from the IP address conversion information holding means 15 forms a message (hereinafter, referred to as a 'message E') to notify of the IPv4 address as an IPv4 address corresponding to the domain name of the IPv6 terminal 5 and sends it to the IP transmitting and receiving means 10. The IP transmitting and receiving means 10 transmits the message E to the IPv4 terminal 2 via the IPv4 network.

[0093] On the other hand, the DNS substituting means 13 which received the notification indicating that the entry is not registered yet from the IP address conversion information holding means 15 instructs the IPv4 address capturing means 14 so as to capture the IPv4 address and, after that, waits for a response for a predetermined time. The IPv4 address capturing means 14 forms an IPv4 address capturing message (hereinafter, called a 'message C') instructs the IP transmitting and receiving means 10 so as to transfer the message C to the DHCPv4 server 4, sends the message C thereto, and after that,

waits for a response for a predetermined time. The IP transmitting and receiving means 10 transmits the message C to the DHCPv4 server 4 via the IPv4 network.

[0094] The DHCPv4 server 4 which received the message C gives the IPv4 address to the IPv6 address (1 :: 1) of the IPv6 terminal 5 (it is now assumed that "133. 144. 95. 1" has been given) and returns an IPv4 address given message (hereinafter, called a 'message D').

[0095] The IP transmitting and receiving means 10 which received the message D sends the message D to the IPv4 address capturing means 14. The IPv4 address capturing means 14 obtains the IPv4 address (133. 144. 95. 1) from the message D and notifies the DNS substituting means 13. The DNS substituting means 13 forms the message E to notify of the IPv4 address (133. 144. 95. 1) as an IP address corresponding to the domain name of the IPv6 terminal 5 and sends it to the IP transmitting and receiving means 10. The IP transmitting and receiving means 10 transmits the message E to the IPv4 terminal 2 via the IPv4 network. The DNS substituting means 13 sends the IPv4 address (133. 144. 95. 1) captured from the DHCPv4 server 4 to the IP address conversion information holding means 15 in correspondence to the IPv6 address (1 :: 1) of the IPv6 terminal 5. The IP address conversion information holding means 15 forms a new entry into the IP address conversion table 151 and registers a correspondence of the IPv4 address (133. 144. 95. 1) and the IPv6 address (1 :: 1) of the IPv6 terminal 5. The entry of the IP address conversion table 151 is deleted in the case where it is not referred for a predetermined time. The IPv4 address (133. 144. 95. 1) is returned to the DHCPv4 server 4.

[0096] As shown in Fig. 13, the IPv4 terminal 2 transmits the IPv4 packet in which the IPv4 address (133. 144. 95. 1) notified from the IPv4-IPv6 converting apparatus 1a by the message E has been set into an IPv4 destination address field of the IPv4 packet and an own IPv4 address (133. 144. 95. 101) has been set into an IPv4 source address field to the IPv4-IPv6 converting apparatus 1a through the IPv4 network.

[0097] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a sends the received IPv4 packet to the IP header converting means 11. The IP header converting means 11 extracts the IPv4 address (133. 144. 95. 101) from the IPv4 source address field of the IPv4 packet, and sends it to the IP address conversion information holding means 15. The IP address conversion information holding means 15 retrieves the IP address conversion table 151 by using the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2 as a key. When the relevant entry has been registered, the IPv6 address of the entry is returned to the IP header converting means 11. On the other hand, if the relevant entry is not registered yet, such a fact is notified to the IP header converting means 11.

[0098] The IP header converting means 11 which received the notification that the entry is not registered from the IP address conversion information holding means 15

instructs the IPv6 address capturing means 20 so as to capture the IPv6 address and, after that, waits for a reply for a predetermined time. The IPv6 address capturing means 20 forms an IPv6 address capturing message (hereinafter, referred to as a "message C6"), instructs the IP transmitting and receiving means 10 so as to transfer the message C6 to the DHCPv6 server 7 (Fig. 11), supplies the message C6 thereto, and after that, waits a replay for a predetermined time. The IP transmitting and receiving means 10 transmits the message C6 to the DHCPv6 server 7 via the IPv6 network.

[0099] The DHCPv6 server 7 which received the message C6 gives the IPv6 address to the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2 (it is now assumed that 1 :: 101 was given) and returns an IPv6 address given message (hereinafter, referred to as a "message D6").

[0100] The IP transmitting and receiving means 10 which received the message D6 supplies the message D6 to the IPv6 address capturing means 20 (Fig. 10). The IPv6 address capturing means 20 obtains an IPv6 address (1 :: 101) from the message D6 and notifies the IP header converting means 11.

[0101] The IP header converting means 11 transmits the IPv6 address (1 :: 101) captured from the DHCPv6 server 7 to the IP address conversion information holding means 15 so as to correspond to the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2. The IP address conversion information holding means 15 forms a new entry into the IP address conversion table 151 and registers a correspondence between the IPv6 address (1 :: 101) and the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2. The entry in the IP address conversion table 151 is deleted when it is not referred to for a predetermined time. The IPv6 address (1 :: 101) is returned to the DHCPv6 server 7.

[0102] When a notification that the relevant entry has been registered in the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2 is received or when the registration of the relevant entry into the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2 is completed, the IPv6 address (1 :: 101) of the relevant entry is set into an IPv6 transmission address field of the IPv6 packet. The IP header converting means 11 extracts the IPv4 address (133. 144. 95. 1) from the IPv4 destination address field of the IPv4 packet and sends it to the IP address conversion information holding means 15. The IP address conversion information holding means 15 obtains the IPv6 address (1 :: 1) corresponding to the IPv4 address (133. 144. 95. 1) with reference to the IP address conversion table 151 and sends it to the IP header converting means 11. The IP header converting means 11 sets the IPv6 address (1 :: 1) into an IPv6 destination address field of the IPv6 packet. The IPv6 packet formed by performing the IP header conversion as mentioned above is sent to the IP transmitting and receiving means 10. The IP transmitting and receiving means 10 transmits the IPv6 packet to the IPv6 terminal 5 through the IPv6 network.

[0103] In this manner, the communication from the IPv4 terminal 2 to the IPv6 terminal 5 can be started.

[0104] Figs. 14 and 15 are flowcharts for operation in another case of starting a communication from the IPv6 terminal 5 to the IPv4 terminal 2. This case has the feature in that the "IPv4-mapped IPv6 address" is not used.

[0105] Although the IPv6 terminal 5 knows a domain name of the IPv4 terminal 2, it doesn't know the IP address. As shown in Fig. 14, therefore, the IPv6 terminal 5 transmits an inquiry message (hereinafter, called a 'message K') of an IP address corresponding to the domain name of the IPv4 terminal 2 to the IPv4-IPv6 converting apparatus 1a via the IPv6 network 106 and, after that, waits for a response for a predetermined time.

[0106] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a receives and processes the message K and sends it to the DNS substituting means 13. The DNS substituting means 13 instructs the IP transmitting and receiving means 10 so as to transfer the message K to the DNSv6 server 6, sends the message K thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transfers the message K to the DNSv6 server 6 via the IPv6 network.

[0107] The DNSv6 server 6 which received the message K retrieves the domain information of the IPv4 terminal 2. However, when it is not registered, a response to the message K is not returned.

[0108] The DNS substituting means 13 which didn't receive the response from the DNSv6 server 6 even after the elapse of a predetermined time instructs the IP transmitting and receiving means 10 so as to transfer the message K to the DNSv4 server 3, sends the message K thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transfers the message K to the DNSv4 server 3 via the IPv4 network.

[0109] The DNSv4 server 3 which received the message K retrieves the domain information of the IPv4 terminal 2 and returns the registered domain information of the IPv4 terminal 2 to the IPv4-IPv6 converting apparatus 1a as a response message (hereinafter, called a 'message L') for the message K.

[0110] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a which received the response from the DNSv4 server 3 within the predetermined time sends the received message L to the DNS substituting means 13. The DNS substituting means 13 obtains the IPv4 address (133. 144. 95. 101) corresponding to the domain name of the IPv4 terminal 2 from the message L.

[0111] Subsequently, the DNS substituting means 13 sends the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2 to the IP address conversion information holding means 15. The IP address conversion information holding means 15 retrieves the IP address conversion table 151 by using the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2 as a key and notifies the DNS sub-

stituting means 13 of information about whether the relevant entry has been registered or not.

[0112] The DNS substituting means 13 which received a notification indicating that the relevant entry is not registered yet in the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2 instructs the IPv6 address capturing means 20 so as to capture the IPv6 address and, after that, waits for a response for a predetermined time. The IPv6 address capturing means 20 forms an IPv6 address capture message (hereinafter, called a 'message M6'), instructs the IP transmitting and receiving means 10 so as to transfer the message M to the DHCPv6 server 7, sends the message M thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transmits the message M6 to the DHCPv6 server 7 via the IPv6 network.

[0113] The DHCPv6 server 7 which received the message M6 gives the IPv6 address to the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2 (it is now assumed that "1 :: 101" is given) and returns an IPv6 address given message (hereinafter, called a 'message N6').

[0114] The IP transmitting and receiving means 10 which received the message N6 sends the message N6 to the IPv6 address capturing means 20. The IPv6 address capturing means 20 obtains the IPv6 address (1 :: 101) from the message N6 and notifies the DNS substituting means 13. The DNS substituting means 13 sends the IPv6 address (1 :: 101) captured from the DHCPv6 server 7 to the IP address conversion information holding means 15 in correspondence to the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2. The IP address conversion information holding means 15 forms a new entry into the IP address conversion table 151 and registers a correspondence of the IPv6 address (1 :: 101) and the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2. The entry in the IP address conversion table 151 is deleted when it is not referred to for a predetermined time and the IPv6 address (1 :: 101) is returned to the DHCPv6 server 7.

[0115] When a notification indicating that the relevant entry has been registered in the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2 is received or when the registration of the relevant entry into the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2 is completed, the DNS substituting means 13 forms a message (hereinafter, called a 'message P') to notify of the IPv6 address (1 :: 101) corresponding to the IPv4 address (133. 144. 95. 101) of the IPv4 terminal 2 as an IP address corresponding to the domain name of the IPv4 terminal 2. The DNS substituting means 13 instructs the IP transmitting and receiving means 10 so as to transfer the message P to the IPv6 terminal 5 and sends the message P thereto. The IP transmitting and receiving means 10 transmits the message P to the IPv6 terminal 5 via the IPv6 network.

[0116] As shown in Fig. 15, the IPv6 terminal 5 transmits the IPv6 packet in which the IPv6 address (1 :: 101) notified from the IPv4-IPv6 converting apparatus 1a has been set into the IPv6 destination address field of the

IPv6 packet and the own IPv6 address (1::1) has been set into the IPv6 source address field to the IPv4-IPv6 converting apparatus 1a through the IPv6 network.

[0117] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1a sends the received IPv6 packet to the IP header converting means 11. The IP header converting means 11 extracts the IPv6 address (1::101) from the IPv6 destination address field of the IPv6 packet, and supplies it to the IP address conversion information holding means 15. The IP address conversion information holding means 15 obtains the IPv4 address (133. 144. 95. 101) corresponding to the IPv6 address (1::101) with reference to the IP address conversion table 151 and transmits to the IP header converting means 11. The IP header converting means 11 sets the IPv4 address (133. 144. 95. 101) into the IPv4 destination address field of the IPv4 packet. The IP header converting means 11 extracts the IPv6 address (1::1) from the IPv6 source address field of the IPv6 packet and sends it to the IP address conversion information holding means 15.

[0118] The IP address conversion information holding means 15 retrieves the IP address conversion table 151 by using the IPv6 address (1::1) of the IPv6 terminal 5 as a key and notifies the IP header converting means 11 of a result indicating whether the relevant entry has been registered or not.

[0119] The IP header converting means 11 which received the notification that the relevant entry is not registered yet in the IPv6 address (1::1) of the IPv6 terminal 5 instructs the IPv4 address capturing means 14 so as to capture the IPv4 address and, after that, waits for a reply for a predetermined time. The IPv4 address capturing means 14 forms an IPv4 address capturing message (hereinafter, referred to as a "message M"), instructs the IP transmitting and receiving means 10 so as to transfer the message M to the DHCPv4 server 4, supplies the message M thereto, and after that, waits for a reply for a predetermined time. The IP transmitting and receiving means 10 transmits the message M to the DHCPv4 server 4 via the IPv4 network.

[0120] The DHCPv4 server 4 which received the message M gives the IPv4 address to the IPv6 address (1::1) of the IPv6 terminal 5 (it is now assumed that 133. 144. 95. 1 was given) and returns an IPv4 address given message (hereinafter, referred to as a "message N").

[0121] The IP transmitting and receiving means 10 which received the message N transmits the message N to the IPv4 address capturing means 14. The IPv4 address capturing means 14 obtains the IPv4 address (133. 144. 95. 1) from the message N and notifies the IP header converting means 11. The IP header converting means 11 transmits the IPv4 address (133. 144. 95. 1) captured from the DHCPv4 server 4 to the IP address conversion information holding means 15 so as to correspond to the IPv6 address (1::1) of the IPv6 terminal 5. The IP address conversion information holding means 15 forms a new entry into the IP address conversion table

151 and registers the correspondence between the IPv4 address (133. 144. 95. 1) and the IPv6 address (1::1) of the IPv6 terminal 5. The entry of the IP address conversion table 151 is deleted when it is not referred to for a predetermined time. The IPv4 address (133. 144. 95. 1) is returned to the DHCPv4 server 4.

[0122] When a notification that the corresponding entry has been registered in the IPv6 address (1::1) of the IPv6 terminal 5 is received or when the registration of the corresponding entry into the IPv6 address (1::1) of the IPv6 terminal 5 is completed, the IP header converting means 11 sets the IPv4 address (133. 144. 95. 1) into the IPv4 source address field of the IPv4 packet. The IPv4 packet formed by performing the IP header conversion as mentioned above is sent to the IP transmitting and receiving means 10. The IP transmitting and receiving means 10 transmits the IPv4 packet to the IPv4 terminal 2 through the IPv4 network.

[0123] In this manner, the communication from the IPv6 terminal 5 to the IPv4 terminal 2 can be started.

(B) Second embodiment

[0124] Fig. 16 is a constructional diagram of an IPv4-IPv6 converting apparatus 1b according to the second embodiment of the invention.

[0125] The IPv4-IPv6 converting apparatus 1b has a construction obtained by adding IPv4 address pool means 16 to the IPv4-IPv6 converting apparatus 1a of Fig. 1.

[0126] At the time of an activation or the like of the IPv4-IPv6 converting apparatus 1b, the IPv4 address capturing means 14 captures a plurality of IPv4 addresses in a lump from the DHCPv4 server 4 and pools them into the IPv4 address pool means 16. At the start of the communication between the IPv4 terminal 2 and IPv6 terminal 5, the IPv4 address capturing means 14 obtains the IPv4 addresses from the IPv4 address pool means 16.

[0127] By using the IPv4-IPv6 converting apparatus 1b, a load of the IPv4 network 104 can be reduced more than the case of capturing the IPv4 addresses one by one from the DHCPv4 server 4.

(C) Third embodiment

[0128] Fig. 17 is a constructional diagram of an IPv4-IPv6 converting apparatus 1c according to the third embodiment of the invention.

[0129] The IPv4-IPv6 converting apparatus 1c has a construction obtained by providing DHCPv4 server means 17 in place of the IPv4 address capturing means 14 of the IPv4-IPv6 converting apparatus 1a of Fig. 1.

[0130] By using the IPv4-IPv6 converting apparatus 1c, there is no need to individually provide the DHCPv4 server 4.

(D) Fourth embodiment

[0131] Fig. 18 is a constructional diagram of an IPv4-IPv6 converting apparatus 1d according to the fourth embodiment of the invention.

[0132] The IPv4-IPv6 converting apparatus 1d has a construction obtained by adding DNSv4 server means 18 and DNSv6 server means 19 to the IPv4-IPv6 converting apparatus 1a of Fig. 1.

[0133] By using the IPv4-IPv6 converting apparatus 1d, there is no need to individually provide the DNSv4 server 3 and DNSv6 server 6.

(E) Fifth embodiment

[0134] The fifth embodiment will now be described by using Figs. 19, 20, and 21.

[0135] Fig. 19 is a diagram of a communication network system 108 in which the IPv6 network 106 and an IPv6 network 107 are connected through the IPv4 network 104. The communication network system 108 has a construction obtained by adding the IPv6 network 107 to the communication network system 100 of Fig. 3. The IPv6 network 107 is connected to the IPv4 network 104 by an IPv4-IPv6 converting apparatus 111.

[0136] In addition to an IPv6 terminal 115, a DNSv6 server 116 for managing domain information in the IPv6 network 107 is connected to the IPv6 network 107.

[0137] It is now assumed that (2 :: 1) has been allocated as an IPv6 address to the IPv6 terminal 115. In addition to 100 IPv4 addresses of "133. 144. 95. 1" to "133. 144. 95. 100", 100 IPv4 addresses of "133. 144. 96. 1" to "133. 144. 96. 100" have been pooled in the DHCPv4 server 4. It is also assumed that the IPv4-IPv6 converting apparatus 111 has been set as a DNS server in the IPv6 terminal 115. It is assumed that the DNSv6 server 116 has been set as a DNS server and the DHCPv4 server 4 has been set as a DHCP server into the IPv4-IPv6 converting apparatus 111. It is also assumed that the IPv4-IPv6 converting apparatus 111 has been set as a DNS server of an upper domain into an IPv4-IPv6 converting apparatus 1.

[0138] Figs. 20 and 21 are flowcharts for the operation in case of starting a communication from the IPv6 terminal 5 to the IPv6 terminal 115.

[0139] Although the IPv6 terminal 5 knows a domain name of the IPv6 terminal 115, it doesn't know an IP address. Therefore, as shown in Fig. 20, the IPv6 terminal 5 transmits an inquiry message (hereinafter, called a 'message Q') of the IP address corresponding to the domain name of the IPv6 terminal 115 to the IPv4-IPv6 converting apparatus 1 via the IPv6 network 106 and, after that, waits for a response for a predetermined time.

[0140] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1 receives and processes the message Q and sends it to the DNS substituting means 13. The DNS substituting means 13 instructs the IP transmitting and receiving means 10 so as to trans-

fer the message Q to the IPv4-IPv6 converting apparatus 111, sends the message Q thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transfers the message Q to the IPv4-IPv6 converting apparatus 111 via the IPv4 network.

[0141] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 111 receives and processes the message Q and sends it to the DNS substituting means 13. The DNS substituting means 13 instructs the IP transmitting and receiving means 10 so as to transfer the message Q to the DNSv6 server 116, sends the message Q thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transfers the message Q to the DNSv6 server 116 via the IPv6 network.

[0142] The DNSv6 server 116 which received the message Q retrieves domain information of the IPv6 terminal 115 and returns the registered domain information of the IPv6 terminal 115 to the IPv4-IPv6 converting apparatus 111 as a response message (hereinafter, called a 'message R') for the message Q.

[0143] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 111 which received the response from the DNSv6 server 116 within a predetermined time sends the received message R to the DNS substituting means 13. The DNS substituting means 13 obtains an IPv6 address (2 :: 1) corresponding to the domain name of the IPv6 terminal 115 from the message R and sends it to the IP address conversion information holding means 15. The IP address conversion information holding means 15 retrieves the IP address conversion table 151 by using the IPv6 address (2 :: 1) of the IPv6 terminal 115 as a key. If the relevant entry has been registered, the holding means 15 returns the IPv4 address of the entry to the DNS substituting means 13. On the other hand, if the relevant entry is not registered yet, such a fact is notified to the DNS substituting means 13.

[0144] The DNS substituting means 13 which received the IPv4 address from the IP address conversion information holding means 15 forms a message (hereinafter, called a 'message U') to notify of the IPv4 address as an IPv4 address corresponding to the domain name of the IPv6 terminal 115 and sends the message U to the IP transmitting and receiving means 10. The IP transmitting and receiving means 10 transmits the message U to the IPv4-IPv6 converting apparatus 1 via the IPv4 network.

[0145] The DNS substituting means 13 which received the notification that the entry is not registered yet from the IP address conversion information holding means 15 instructs the IPv4 address capturing means 14 so as to capture the IPv4 address and, after that, waits for a response for a predetermined time. The IPv4 address capturing means 14 forms an IPv4 address capturing message (hereinafter, called a 'message S'), instructs the IP transmitting and receiving means 10 so as to transfer the message S to the DHCPv4 server 4, sends the message S thereto, and after that, waits for a response for a pre-

determined time. The IP transmitting and receiving means 10 transmits the message S to the DHCPv4 server 4 via the IPv4 network.

[0146] The DHCPv4 server 4 which received the message S gives the IPv4 address to the IPv6 address (2 :: 1) of the IPv6 terminal 115 (it is now assumed that "133. 144. 96. 1" is given) and returns an IPv4 address given message (hereinafter, called a 'message T').

[0147] The IP transmitting and receiving means 10 which received the message T sends the message T to the IPv4 address capturing means 14. The IPv4 address capturing means 14 obtains the IPv4 address (133. 144. 96. 1) from the message T and notifies the DNS substituting means 13. The DNS substituting means 13 forms the message U to notify of the IPv4 address (133. 144. 96. 1) as an IP address corresponding to the domain name of the IPv6 terminal 115 and sends it to the IP transmitting and receiving means 10. The IP transmitting and receiving means 10 transmits the message U to the IPv4-IPv6 converting apparatus 1 via the IPv4 network. The DNS substituting means 13 sends the IPv4 address (133. 144. 96. 1) captured from the DHCPv4 server 4 to the IP address conversion information holding means 15 in correspondence to the IPv6 address (2 :: 1) of the IPv6 terminal 115. The IP address conversion information holding means 15 forms a new entry into the IP address conversion table 151 and registers a correspondence of the IPv4 address (133. 144. 96. 1) and the IPv6 address (2 :: 1) of the IPv6 terminal 115. The entry in the IP address conversion table 151 is deleted when it is not referred to for a predetermined time. The IPv4 address (133. 144. 96. 1) is returned to the DHCPv4 server 4.

[0148] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1 which received the response from the IPv4-IPv6 converting apparatus 111 within the predetermined time sends the received message U to the DNS substituting means 13. The DNS substituting means 13 obtains the IPv4 address (133. 144. 96. 1) corresponding to the domain name of the IPv6 terminal 115 from the message U. The DNS substituting means 13 forms a message (hereinafter, called a 'message V') to notify of an 'IPv4-mapped IPv6 address' (: : FFFF : 133. 144. 96. 1) in which the IPv4 address (133. 144. 96. 1) derived from the message U has been set as an IP address corresponding to the domain name of the IPv6 terminal 115, instructs the IP transmitting and receiving means 10 so as to transfer the message V to the IPv6 terminal 5, and sends the message V thereto. The IP transmitting and receiving means 10 transmits the message V to the IPv6 terminal 5 via the IPv6 network.

[0149] As shown in Fig. 21, the IPv6 terminal 5 transmits the IPv6 packet in which the IPv6 address (: : FFFF : 133. 144. 96. 1) notified from the IPv4-IPv6 converting apparatus 1 has been set into the IPv6 destination address field of the IPv6 packet and the own IPv6 address (1 :: 1) has been set into the IPv6 source address field to the IPv4-IPv6 converting apparatus 1 through the IPv6

network.

[0150] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 1 sends the received IPv6 packet to the IP header converting means 11. The IP header converting means 11 extracts the IPv6 address (: : FFFF : 133. 144. 96. 1) from the IPv6 destination address field of the IPv6 packet, converts the IPv6 address to the IPv4 address (133. 144. 96. 1) of 32 bits by deleting the fixed pattern of 96 bits mentioned above, and sets the IPv4 address into the IPv4 destination address field of the IPv4 packet. The IP header converting means 11 extracts the IPv6 address (1 :: 1) from the IPv6 source address field of the IPv6 packet and sends it to the IP address conversion information holding means 15.

[0151] The IP address conversion information holding means 15 retrieves the IP address conversion table 151 by using the IPv6 address (1 :: 1) of the IPv6 terminal 5 as a key and notifies the IP header converting means 11 of a message indicating whether the relevant entry has been registered or not.

[0152] The IP header converting means 11 which received the notification that the relevant entry is not registered yet in the IPv6 address (1 :: 1) of the IPv6 terminal 5 instructs the IPv4 address capturing means 14 so as to capture the IPv4 address and, after that, waits for a response for a predetermined time. The IPv4 address capturing means 14 forms an IPv4 address capturing message (hereinafter, called a 'message W'), instructs the IP transmitting and receiving means 10 so as to transfer the message W to the DHCPv4 server 4, sends the message W thereto, and after that, waits for a response for a predetermined time. The IP transmitting and receiving means 10 transmits the message W to the DHCPv4 server 4 via the IPv4 network.

[0153] The DHCPv4 server 4 which received the message W gives the IPv4 address to the IPv6 address (1 :: 1) of the IPv6 terminal 5 (it is now assumed that "133. 144. 95. 1" is given) and returns an IPv4 address given message (hereinafter, called a 'message X').

[0154] The IP transmitting and receiving means 10 which received the message X sends the message X to the IPv4 address capturing means 14. The IPv4 address capturing means 14 obtains the IPv4 address (133. 144. 95. 1) from the message X and notifies the IP header converting means 11. The IP header converting means 11 sends the IPv4 address (133. 144. 95. 1) captured from the DHCPv4 server 4 to the IP address conversion information holding means 15 in correspondence to the IPv6 address (1 :: 1) of the IPv6 terminal 5. The IP address conversion information holding means 15 forms a new entry into the IP address conversion table 151 and registers a correspondence of the IPv4 address (133. 144. 95. 1) and the IPv6 address (1 :: 1) of the IPv6 terminal 5. The entry in the IP address conversion table 151 is deleted when it is not referred to for a predetermined time. The IPv4 address (133. 144. 95. 1) is returned to the DHCPv4 server 4.

[0155] When a notification that the relevant entry has

been registered in the IPv6 address (1::1) of the IPv6 terminal 5 is received or when the registration of the relevant entry into the IPv6 address (1::1) of the IPv6 terminal 5 is completed, the IP header converting means 11 sets the IPv4 address (133. 144. 95. 1) into the IPv4 source address field of the IPv4 packet. The IPv4 packet formed by performing the IP header conversion as mentioned above is sent to the IP transmitting and receiving means 10. The IP transmitting and receiving means 10 transmits the IPv4 packet to the IPv4-IPv6 converting apparatus 111 through the IPv4 network.

[0156] The IP transmitting and receiving means 10 of the IPv4-IPv6 converting apparatus 111 sends the received IPv4 packet to the IP header converting means 11. The IP header converting means 11 extracts the IPv4 address (133. 144. 95. 1) from the IPv4 source address field of the IPv4 packet, converts the IPv4 address to an 'IPv4-mapped IPv6 address' (: : FFFF : 133. 144. 95. 1) of 128 bits by adding the fixed pattern of 96 bits mentioned above, and sets it into the IPv6 source address field of the IPv6 packet. The IP header converting means 11 extracts the IPv4 address (133. 144. 96. 1) from the IPv4 destination address field of the IPv4 packet and sends the IPv4 address to the IP address conversion information holding means 15. The IP address conversion information holding means 15 obtains the IPv6 address (2::1) corresponding to the IPv4 address (133. 144. 96. 1) with reference to the IP address conversion table 151 and sends the IPv6 address to the IP header converting means 11. The IP header converting means 11 sets the IPv6 address (2::1) into the IPv6 destination address field of the IPv6 packet. The IPv6 packet formed by performing the IP header conversion as mentioned above is sent to the IP transmitting and receiving means 10. The IP transmitting and receiving means 10 transmits the IPv6 packet to the IPv6 terminal 115 through the IPv6 network.

[0157] In this manner, the communication from the IPv6 terminal 5 to the IPv6 terminal 115 can be started.

[0158] Although the invention has been described above by using the communication between the two IPv6 terminals when there is the IPv4 network on the communication path, a similar construction can be also applied to a communication between the two IPv4 terminals when there is the IPv6 network on the communication path.

[0159] Although the invention has been also described above by using the communication between the two IPv6 terminals when there is only one IPv4 network on the communication path, a similar construction can be also applied to a communication between the two IPv6 terminals when there are a plurality of IPv4 networks and IPv6 networks on the communication path, a communication between the two IPv4 terminals, and a communication between the IPv4 terminal and the IPv6 terminal.

[0160] According to the IPv4-IPv6 communicating method and IPv4-IPv6 converting apparatus of the invention, only the IPv6 protocol is installed to the IPv6 terminal and even if the IPv4 address is not previously

fixedly allocated, the communication between the IPv4 terminal and the IPv6 terminal can be executed. Further, since the partner can be designated not by the actual IP address but by the domain name, the communication can be performed without mutually being aware whether the partner uses the IPv4 or IPv6 as a communication protocol.

[0161] As for the registration and deletion of the entry in the conversion table of the IPv4 address and IPv6 address, by limiting by the setting of a manager, the system can also become a fire wall between the IPv4 network and the IPv6 network.

[0162] A communication between the two IPv6 terminals partitioned by the IPv4 network can be also executed without preliminarily performing any special setting. Similarly, a communication between the two IPv4 terminals partitioned by the IPv6 network can be executed without preliminarily performing any special setting.

[0163] Further, even if any special setting is not preliminarily performed, a communication between the IPv4 terminals partitioned by a plurality of IPv4 networks and IPv6 networks, a communication between the IPv6 terminals, and a communication between the IPv4 terminal and the IPv6 terminal can be executed.

Claims

1. A method of communicating between an IPv4 terminal (2) of an IPv4 network (104) and an IPv6 terminal (5, 115) of an IPv6 network (106, 107) in a communication network system comprising said IPv4 network (104), said IPv6 network (106, 107), and an IPv4-IPv6 converting apparatus (1a, 1b, 1c, 1d, 1, 111) connected to both of said networks, comprising the steps of:

in accordance with that said IPv4 terminal inquires an IP address for a domain name of said IPv6 terminal to said IPv4-IPv6 converting apparatus, obtaining, in said IPv4-IPv6 converting apparatus, an IPv6 address for said domain name from a DNSv6 server apparatus (6, 116) for managing domain information of said IPv6 network;
capturing, in said IPv4-IPv6 converting apparatus, an IPv4 address corresponding to said IPv6 address from a DHCPv4 server apparatus (4) for dynamically allocating IPv4 addresses and notifying said IPv4 terminal;
forming, in said IPv4 terminal, a first IPv4 packet by setting an own IPv4 address to an IPv4 source address and by setting said notified IPv4 address to an IPv4 destination address, and sending said first IPv4 packet to said IPv4-IPv6 converting apparatus; and
converting, in said IPv4-IPv6 converting apparatus, the IPv4 source address included in said

received first IPv4 packet to an IPv6 source address by adding fixed data to said IPv4 source address, converting an IPv4 destination address included in said IPv4 packet to a corresponding IPv6 address, forming a first IPv6 packet from said first IPv4 packet, and sending said first IPv6 packet to said IPv6 network.

2. A method according to claim 1, further comprising the steps of:

forming, in said IPv6 terminal (5, 115), a second IPv6 packet by setting an own IPv6 address to the IPv6 source address and by setting said IPv6 source address included in said received first IPv6 packet to an IPv6 destination address, and sending said second IPv6 packet to said IPv4-IPv6 converting apparatus (1a, 1b, 1c, 1d, 1, 111); and
converting, in said IPv4-IPv6 converting apparatus, the IPv6 destination address included in said received second IPv6 packet to the IPv4 destination address by deleting the fixed data from said IPv6 destination address, converting the IPv6 source address included in said IPv6 packet to the corresponding IPv4 address, forming a second IPv4 packet from said second IPv6 packet, and sending said second IPv4 packet to said IPv4 network (104).

3. A method of communication between an IPv4 terminal (2) of an IPv4 network (104) and an IPv6 terminal (5, 115) of an IPv6 network (106, 107) in a communication network system comprising said IPv4 network (104), said IPv6 network (106, 107), and an IPv4-IPv6 converting apparatus (1a, 1b, 1c, 1d, 1, 111) connected to both of said networks, comprising the steps of:

in accordance with that said IPv6 terminal inquires an IP address for a domain name of said IPv4 terminal to said IPv4-IPv6 converting apparatus, obtaining, in said IPv4-IPv6 converting apparatus, an IPv4 address for said domain name from a DNSv4 server apparatus (3) for managing domain information of said IPv4 network, and notifying said IPv6 terminal of an IPv6 address derived by adding fixed data to said IPv4 address;

forming, in said IPv6 terminal, a first IPv6 packet by setting an own IPv6 address to an IPv6 source address and by setting said notified IPv6 address to an IPv6 destination address, and sending said first IPv6 packet to said IPv4-IPv6 converting apparatus; and

converting, in said IPv4-IPv6 converting apparatus, said IPv6 destination address included in said received first IPv6 packet to an IPv4 destination

address by deleting fixed data from said IPv6 destination address, capturing dynamically an IPv4 address corresponding to the IPv6 source address included in said first IPv6 packet from a DHCPv4 server apparatus (4) for dynamically allocating the IPv4 address, forming a first IPv4 packet from said first IPv6 packet by using said IPv4 address, and sending said first IPv4 packet to said IPv4 network (104).

4. A method according to claim 3, further comprising the steps of:

forming, in said IPv4 terminal (2), a second IPv4 packet by setting an own IPv4 address to the IPv4 source address and by setting said IPv4 source address included in said received first IPv4 packet to an IPv4 destination address, and sending said second IPv4 packet to said IPv4-IPv6 converting apparatus; and
converting, in said IPv4-IPv6 converting apparatus, the IPv4 source address included in said received second IPv4 packet to the IPv6 source address by adding fixed data to said IPv4 source address, converting the IPv4 destination address included in said IPv4 packet to a corresponding IPv6 address, forming a second IPv6 packet from said second IPv4 packet, and sending said second IPv6 packet to said IPv6 network (106, 107).

5. An IPv4-IPv6 converting apparatus connected to an IPv4 network (104) and an IPv6 network (106, 107), comprising:

- (a) IPv4 address capturing means (14) for capturing an IPv4 address from a DHCPv4 server (4) of said IPv4 network;
- (b) IP address conversion information holding means (15) for holding an IPv6 address of an IPv6 terminal and said captured IPv4 address in correspondence to each other;
- (c) IP transmitting and receiving means (10) for transmitting and receiving an IPv4 packet to/from said IPv4 network (104) and for transmitting and receiving an IPv6 packet to/from said IPv6 network (106, 107);
- (d) IP header converting means (11) for converting an IPv4 source address included in said received IPv4 packet to an IPv6 source address by adding fixed data to said IPv4 source address, for converting an IPv4 destination address included in said IPv4 packet to a corresponding IPv6 destination address by using said IP address conversion information holding means (15), and for forming a corresponding IPv6 packet from said IPv4 packet; and
- (e) DNS substituting means for receiving an in-

- quiry of an IP address for a domain name of the IPv6 terminal from an IPv4 terminal, for obtaining an IPv6 address by inquiring to a DNSv6 server, for notifying said IPv4 terminal of said IPv4 address if said IPv4 address corresponding to said IPv6 address is held in said IP address conversion information holding means, for capturing the IPv4 address by said IPv4 address capturing means if the IPv4 address corresponding to said IPv6 address is not held in said IP address conversion information holding means, for holding said IPv6 address and said captured IPv4 address into said IP address conversion information holding means so as to correspond to each other, for notifying said IPv4 terminal of said IPv4 address, similarly for receiving an inquiry of an IP address for a domain name of the IPv4 terminal from the IPv6 terminal, for obtaining an IPv4 address by inquiring to the DNSv4 server, for notifying said IPv6 terminal of said IPv6 address if the IPv6 address corresponding to said IPv4 address is held in said IP address conversion information holding means, for capturing the IPv6 address by an IPv6 address capturing means if the IPv6 address corresponding to said IPv4 address is not held in said IP address conversion information holding means, for holding said IPv4 address and said captured IPv6 address into said IP address conversion information holding means so as to correspond to each other, and for notifying said IPv6 terminal of said IPv6 address.
6. An apparatus according to claim 5, further comprising IPv6 address means for capturing an IPv6 address from a DHCPv6 server of said IPv6 network.
7. An apparatus according to claim 5, wherein said IP address conversion information holding means (15) deletes an address which is not referred to for a predetermined time in the correspondence of said IPv6 address and IPv4 address held and returns the deleted IPv4 address to said DHCPv4 server (4) of said IPv4 network (104).
8. An apparatus according to claim 5, further comprising IPv4 address pool means (16) for pooling a plurality of IPv4 addresses, and wherein said IP address conversion information holding means (15) captures said plurality of IPv4 addresses from said DHCPv4 server (4) of said IPv4 network (104) at the time of activation of the apparatus, pools said captured IPv4 addresses into said IPv4 address pool means (16), and captures the IPv4 address corresponding to the IPv6 address of said IPv6 terminal (5, 115) from said IPv4 address pool means (16).
9. An apparatus according to claim 5, further comprising DHCPv4 server means (17) for dynamically allocating the IPv4 address, and wherein said DHCPv4 server means (17) is used in place of said DHCPv4 server (4) of said IPv4 network (104).

Patentansprüche

1. Verfahren zur Kommunikation zwischen einem IPv4-Endgerät (2) eines IPv4-Netzes (104) und einem IPv6-Endgerät (5, 115) eines IPv6-Netzes (106, 107) in einem Kommunikationsnetzsystem, das das IPv4-Netz (104), das IPv6-Netz (106, 107) und eine mit beiden Netzen verbundene IPv4-IPv6-Umwandlungsvorrichtung (1a, 1b, 1c, 1d, 1, 111) enthält, mit folgenden Schritten:

in Entsprechung dazu, daß das IPv4-Endgerät die IPv4-IPv6-Umwandlungsvorrichtung nach einer IP-Adresse für einen Domainnamen des IPv6-Endgeräts fragt, Gewinnen einer IPv6-Adresse für den Domainnamen von einer DNSv6-Servervorrichtung (6, 116) zum Verwalten von Domain-Informationen des IPv6-Netzes, in der IPv4-IPv6-Umwandlungsvorrichtung, Gewinnen einer der IPv6-Adresse entsprechenden IPv4-Adresse von einer DHCPv4-Servervorrichtung (4) zum dynamischen Zuteilen von IPv4-Adressen, in der IPv4-IPv6-Umwandlungsvorrichtung, und Mitteln an das IPv4-Endgerät, Bilden eines ersten IPv4-Pakets durch Einsetzen einer eigenen IPv4-Adresse als IPv4-Quelladresse und Einsetzen der mitgeteilten IPv4-Adresse als IPv4-Zieladresse, im IPv4-Endgerät, und Senden des ersten IPv4-Pakets an die IPv4-IPv6-Umwandlungsvorrichtung und Umwandeln der im empfangenen ersten IPv4-Paket enthaltenen IPv4-Quelladresse in eine IPv6-Quelladresse durch Hinzufügen fester Daten an die IPv4-Quelladresse, in der IPv4-IPv6-Umwandlungsvorrichtung, Umwandeln der in dem IPv4-Paket enthaltenen IPv4-Zieladresse in eine entsprechende IPv6-Adresse, Bilden eines ersten IPv6-Pakets aus dem ersten IPv4-Paket und Senden des ersten IPv6-Pakets an das IPv6-Netz.

2. Verfahren nach Anspruch 1 mit folgenden Schritten:

Bilden eines zweiten IPv6-Pakets durch Einsetzen einer eigenen IPv6-Adresse als IPv6-Quelladresse und Einsetzen der im empfangenen ersten IPv6-Paket enthaltenen IPv6-Quelladresse als IPv6-Zieladresse, im IPv6-Endgerät (115),

und Senden des zweiten IPv6-Pakets an die IPv4-IPv6-Umwandlungsvorrichtung (1a, 1b, 1c, 1d, 1, 111) und

Umwandeln der im empfangenen zweiten IPv6-Paket enthaltenen IPv6-Zieladresse in die IPv4-Zieladresse durch Löschen der festen Daten von der IPv6-Zieladresse, in der IPv4-IPv6-Umwandlungsvorrichtung, Umwandeln der im IPv6-Paket enthaltenen IPv6-Quelladresse in die entsprechende IPv4-Adresse, Bilden eines zweiten IPv4-Pakets aus dem zweiten IPv6-Paket und Senden des zweiten IPv4-Pakets an das IPv4-Netz (104).

3. Verfahren zur Kommunikation zwischen einem IPv4-Endgerät (2) eines IPv4-Netzes (104) und einem IPv6-Endgerät (5, 115) eines IPv6-Netzes (106, 107) in einem Kommunikationsnetzsystem, das das IPv4-Netz (104), das IPv6-Netz (106, 107) und eine mit beiden Netzen verbundene IPv4-IPv6-Umwandlungsvorrichtung (1a, 1b, 1c, 1d, 1, 111) enthält, mit folgenden Schritten:

In Entsprechung dazu, daß das IPv6-Endgerät die IPv4-IPv6-Umwandlungsvorrichtung nach einer IP-Adresse für einen Domainnamen des IPv4-Endgeräts fragt, Gewinnen einer IPv4-Adresse für den Domainnamen von einer DNSv4-Servervorrichtung (3) zum Verwalten von Domain-Informationen des IPv4-Netzes, in der IPv4-IPv6-Umwandlungsvorrichtung, und Mitteilen einer IPv6-Adresse, die durch Hinzufügen fester Daten zur IPv4-Adresse gewonnen wird, an das IPv6-Endgerät, Bilden eines ersten IPv6-Pakets durch Einsetzen einer eigenen IPv6-Adresse als IPv6-Quelladresse und Einsetzen der mitgeteilten IPv6-Adresse als IPv6-Zieladresse, im IPv6-Endgerät, und Senden des ersten IPv6-Pakets zur IPv4-IPv6-Umwandlungsvorrichtung und Umwandeln der in dem empfangenen ersten IPv6-Paket enthaltenen IPv6-Zieladresse in eine IPv4-Zieladresse durch Löschen fester Daten von der IPv6-Zieladresse, in der IPv4-IPv6-Umwandlungsvorrichtung, dynamisches Gewinnen einer IPv4-Adresse, die der im ersten IPv6-Paket enthaltenen IPv6-Quelladresse entspricht, von einer DHCPv4-Servervorrichtung (4) zum dynamischen Zuteilen der IPv4-Adresse, Bilden eines ersten IPv4-Pakets aus dem ersten IPv6-Paket durch Verwendung der IPv4-Adresse und Senden des ersten IPv4-Pakets an das IPv4-Netz (104).

4. Verfahren nach Anspruch 3 mit folgenden weiteren Schritten:

Bilden eines zweiten IPv4-Pakets durch Einset-

zen einer eigenen IPv4-Adresse als IPv4-Quelladresse und Einsetzen der im empfangenen ersten IPv4-Paket enthaltenen IPv4-Quelladresse als IPv4-Zieladresse, im IPv4-Endgerät (2), und Senden des zweiten IPv4-Pakets an die IPv4-IPv6-Umwandlungsvorrichtung, und Umwandeln der im empfangenen zweiten IPv4-Paket enthaltenen IPv4-Quelladresse in die IPv6-Quelladresse durch Hinzufügen fester Daten zur IPv4-Quelladresse, in der IPv4-IPv6-Umwandlungsvorrichtung, Umwandeln der im IPv4-Paket enthaltenen IPv4-Zieladresse in eine entsprechende IPv6-Adresse, Bilden eines zweiten IPv6-Pakets aus dem zweiten IPv4-Paket und Senden des zweiten IPv6-Pakets an das IPv6-Netz (106, 107).

5. IPv4-IPv6-Umwandlungsvorrichtung, die mit einem IPv4-Netz (104) und einem IPv6-Netz (106, 107) verbunden ist und folgendes aufweist:

(a) eine IPv4-Adressgewinnungseinrichtung (14) zum Gewinnen einer IPv4-Adresse von einem DHCPv4-Server (4) des IPv4-Netzes, (b) eine IP-Adressumwandlungsinformations-Speichereinrichtung (15) zum Speichern einer IPv6-Adresse eines IPv6-Endgeräts und der gewonnenen IPv4-Adresse in Entsprechung zueinander, (c) eine IP-Sende- und Empfangseinrichtung (10) zum Senden und Empfangen eines IPv4-Pakets an das und von dem IPv4-Netz (104) und zum Senden und Empfangen eines IPv6-Pakets an das und von dem IPv6-Netz (106, 107), (d) eine IP-Kopf-Umwandlungseinrichtung (11) zum Umwandeln einer in dem empfangenen IPv4-Paket enthaltenen IPv4-Quelladresse in eine IPv6-Quelladresse durch Hinzufügen fester Daten zur IPv4-Quelladresse, zum Umwandeln einer in dem IPv4-Paket enthaltenen IPv4-Zieladresse in eine entsprechende IPv6-Zieladresse unter Verwendung der IP-Adressumwandlungsinformations-Speichereinrichtung (15) und zum Bilden eines entsprechenden IPv6-Pakets aus dem IPv4-Paket und (e) eine DNS-Ersetzungseinrichtung zum Empfang einer Anfrage nach einer IP-Adresse für einen Domainnamen des IPv6-Endgeräts von einem IPv4-Endgerät, zum Gewinnen einer IPv6-Adresse durch Anfrage bei einem DNSv6-Server, zum Mitteilen der IPv4-Adresse an das IPv4-Endgerät, wenn die der IPv6-Adresse entsprechende IPv4-Adresse in der IP-Adressumwandlungsinformations-Speichereinrichtung gespeichert ist, zum Gewinnen der IPv4-Adresse durch die IPv4-Adressgewinnungseinrichtung, wenn die der IPv6-Adresse entsprechende IPv4-Adresse nicht in der IP-Adressumwand-

- lungsinformations-Speichereinrichtung gespeichert ist, zum Speichern der IPv6-Adresse und der gewonnenen IPv4-Adresse in der IP-Adressumwandlungsinformations-Speichereinrichtung in Entsprechung zueinander, zum Mitteilen der IPv4-Adresse an das IPv4-Endgerät, auf ähnliche Weise zum Empfang einer Anfrage nach einer IP-Adresse für einen Domainnamen des IPv4-Endgeräts vom IPv6-Endgerät, zum Gewinnen einer IPv4-Adresse durch Anfrage beim DNSv4-Server, zum Mitteilen der IPv6-Adresse an das IPv6-Endgerät, wenn die der IPv4-Adresse entsprechende IPv6-Adresse in der IP-Adressumwandlungsinformations-Speichereinrichtung gespeichert ist, zum Gewinnen der IPv6-Adresse durch eine IPv6-Adressgewinnungseinrichtung, wenn die der IPv4-Adresse entsprechende IPv6-Adresse nicht in der IP-Adressumwandlungsinformations-Speichereinrichtung gespeichert ist, zum Speichern der IPv4-Adresse und der gewonnenen IPv6-Adresse in der IP-Adressumwandlungsinformations-Speichereinrichtung in Entsprechung zueinander und zum Mitteilen der IPv6-Adresse an das IPv6-Endgerät.
6. Vorrichtung nach Anspruch 5 mit einer IPv6-Adressereinrichtung zum Gewinnen einer IPv6-Adresse von einem DHCPv6-Server des IPv6-Netzes.
7. Vorrichtung nach Anspruch 5, wobei die IP-Adressumwandlungsinformations-Speichereinrichtung (15) aus der Entsprechung der gespeicherten IPv6-Adresse und IPv4-Adresse eine Adresse löscht, auf die über eine vorbestimmte Zeitspanne kein Bezug genommen wird, und die gelöschte IPv4-Adresse an den DHCPv4-Server (4) des IPv4-Netzes (104) zurückgibt.
8. Vorrichtung nach Anspruch 5 mit einer IPv4-Adressspoleinrichtung (16) zum Halten eines Vorrats mehrerer IPv4-Adressen, wobei die IP-Adressumwandlungsinformations-Speichereinrichtung (15) die mehreren IPv4-Adressen zur Zeit der Aktivierung der Vorrichtung vom DHCPv4-Server (4) des IPv4-Netzes (104) gewinnt, die gewonnenen IPv4-Adressen als Vorrat in die IPv4-Adressspoleinrichtung (16) aufnimmt und die der IPv6-Adresse des IPv6-Endgeräts (5, 115) entsprechende IPv4-Adresse von der IPv4-Adressspoleinrichtung (16) gewinnt.
9. Vorrichtung nach Anspruch 5 mit einer DHCPv4-Servereinrichtung (17) zum dynamischen Zuteilen der IPv4-Adresse, wobei die DHCPv4-Servereinrichtung (17) anstelle des DHCPv4-Servers (4) des IPv4-Netzes (104) verwendet wird.

Revendications

1. Procédé de communication entre un terminal IPv4 (2) d'un réseau IPv4 (104) et un terminal IPv6 (5, 115) d'un réseau IPv6 (106, 107) dans un système de réseau de communication comportant ledit réseau IPv4 (104), ledit réseau IPv6 (106, 107), et un dispositif de conversion IPv4-IPv6 (1a, 1b, 1c, 1d, 1, 111) connecté auxdits deux réseaux, comportant les étapes consistant à :

en conformité avec le fait que ledit terminal IPv4 demande une adresse IP pour un nom de domaine dudit terminal IPv6 audit dispositif de conversion IPv4-IPv6, obtenir, dans ledit dispositif de conversion IPv4-IPv6, une adresse IPv6 pour ledit nom de domaine à partir d'un dispositif serveur DNSv6 (6, 116) pour gérer des informations de domaine dudit réseau IPv6, capturer, dans ledit dispositif de conversion IPv4-IPv6, un adresse IPv4 correspondant à ladite adresse IPv6 à partir d'un dispositif serveur DHCPv4 (4) pour allouer dynamiquement des adresses IPv4 et les notifier audit terminal IPv4, former, dans ledit terminal IPv4, un premier paquet IPv4 en établissant une adresse IPv4 propre à une adresse source IPv4 et en établissant ladite adresse IPv4 notifiée à une adresse de destination IPv4, et envoyer ledit premier paquet IPv4 audit dispositif de conversion IPv4-IPv6, et convertir, dans ledit dispositif de conversion IPv4-IPv6, l'adresse source IPv4 incluse dans ledit premier paquet IPv4 reçu en une adresse source IPv6 en ajoutant des données fixes à ladite adresse source IPv4, convertir une adresse de destination IPv4 incluse dans ledit paquet IPv4 en une adresse IPv6 correspondante, former un premier paquet IPv6 à partir dudit premier paquet IPv4, et envoyer ledit premier paquet IPv6 audit réseau IPv6.

2. Procédé selon la revendication 1, comportant de plus les étapes consistant à :

former, dans ledit terminal IPv6 (5, 115), un second paquet IPv6 en établissant une adresse IPv6 propre à l'adresse source IPv6 et en établissant ladite adresse source IPv6 incluse dans ledit premier paquet IPv6 reçu à une adresse de destination IPv6, et envoyer ledit second paquet IPv6 audit dispositif de conversion IPv4-IPv6 (1a, 1b, 1c, 1d, 1, 111), et convertir, dans ledit dispositif de conversion IPv4-IPv6, l'adresse de destination IPv6 incluse dans ledit second paquet IPv6 reçu en l'adresse de destination IPv4 en supprimant les données fixes dans ladite adresse de destination IPv6, convertir l'adresse source IPv6 incluse dans le-

dit paquet IPv6 en l'adresse IPv4 correspondante, former un second paquet IPv4 à partir dudit second paquet IPv6, et envoyer ledit second paquet IPv4 audit réseau IPv4 (104).

3. Procédé de communication entre un terminal IPv4 (2) d'un réseau IPv4 (104) et un terminal IPv6 (5, 115) d'un réseau IPv6 (106, 107) dans un système de réseau de communication comportant ledit réseau IPv4 (104), ledit réseau IPv6 (106, 107), et un dispositif de conversion IPv4-IPv6 (1a, 1b, 1c, 1d, 1, 111) connecté auxdits deux réseaux, comportant les étapes consistant à :

en conformité avec le fait que ledit terminal IPv6 demande une adresse IP pour un nom de domaine dudit terminal IPv4 audit dispositif de conversion IPv4-IPv6, obtenir, dans ledit dispositif de conversion IPv4-IPv6, une adresse IPv4 pour ledit nom de domaine à partir d'un dispositif serveur DNSv4 (3) pour gérer des informations de domaine dudit réseau IPv4, et notifier audit terminal IPv6 une adresse IPv6 dérivée en ajoutant des données fixes à ladite adresse IPv4, former, dans ledit terminal IPv6, un premier paquet IPv6 en établissant une adresse IPv6 propre à une adresse source IPv6 et en établissant ladite adresse IPv6 notifiée à une adresse de destination IPv6, et envoyer ledit premier paquet IPv6 audit dispositif de conversion IPv4-IPv6, et convertir, dans ledit dispositif de conversion IPv4-IPv6, ladite adresse de destination IPv6 incluse dans ledit premier paquet IPv6 reçu en une adresse de destination IPv4 en supprimant des données fixes dans ladite adresse de destination IPv6, capturer dynamiquement une adresse IPv4 correspondant à l'adresse source IPv6 incluse dans ledit premier paquet IPv6 à partir d'un dispositif serveur DHCPv4 (4) pour allouer dynamiquement l'adresse IPv4, former un premier paquet IPv4 à partir dudit premier paquet IPv6 en utilisant ladite adresse IPv4, et envoyer ledit premier paquet IPv4 audit réseau IPv4 (104).

4. Procédé selon la revendication 3, comportant de plus les étapes consistant à :

former, dans ledit terminal IPv4 (2), un second paquet IPv4 en établissant une adresse IPv4 propre à l'adresse source IPv4 et en établissant ladite adresse source IPv4 incluse dans ledit premier paquet IPv4 reçu à une adresse de destination IPv4, et envoyer ledit second paquet IPv4 audit dispositif de conversion IPv4-IPv6, et convertir, dans ledit dispositif de conversion IPv4-IPv6, l'adresse source IPv4 incluse dans ledit second paquet IPv4 reçu en l'adresse sour-

ce IPv6 en ajoutant des données fixes à ladite adresse source IPv4, convertir l'adresse de destination IPv4 incluse dans ledit paquet IPv4 en une adresse IPv6 correspondante, former un second paquet IPv6 à partir dudit second paquet IPv4, et envoyer ledit second paquet IPv6 audit réseau IPv6 (106, 107).

5. Dispositif de conversion IPv4-IPv6 connecté à un réseau IPv4 (104) et à un réseau IPv6 (106, 107), comportant :

(a) des moyens de capture d'adresse IPv4 (14) pour capturer une adresse IPv4 provenant d'un serveur DHCPv4 (4) dudit réseau IPv4, (b) des moyens de maintien d'informations de conversion d'adresse IP (15) pour maintenir une adresse IPv6 d'un terminal IPv6 et ladite adresse IPv4 capturée en correspondance l'une avec l'autre, (c) des moyens de transmission et de réception IP (10) pour transmettre un paquet IPv4 audit réseau IPv4 (104) et recevoir un paquet IPv4 depuis ce dernier et pour transmettre un paquet IPv6 audit réseau IPv6 (106, 107) et recevoir un paquet IPv6 depuis ce dernier, (d) des moyens de conversion d'en-tête IP (11) pour convertir une adresse source IPv4 incluse dans ledit paquet IPv4 reçu en une adresse source IPv6 en ajoutant des données fixes à ladite adresse source IPv4, pour convertir une adresse de destination IPv4 incluse dans ledit paquet IPv4 en une adresse de destination IPv6 correspondante en utilisant lesdits moyens de maintien d'informations de conversion d'adresse IP (15), et pour former un paquet IPv6 correspondant à partir dudit paquet IPv4, et (e) des moyens de substitution DNS pour recevoir une demande d'une adresse IP pour un nom de domaine du terminal IPv6 depuis un terminal IPv4, pour obtenir une adresse IPv6 en la demandant à un serveur DNSv6, pour notifier audit terminal IPv4 ladite adresse IPv4 si ladite adresse IPv4 correspondant à ladite adresse IPv6 est maintenue dans lesdits moyens de maintien d'informations de conversion d'adresse IP, pour capturer l'adresse IPv4 par lesdits moyens de capture d'adresse IPv4 si l'adresse IPv4 correspondant à ladite adresse IPv6 n'est pas maintenue dans lesdits moyens de maintien d'informations de conversion d'adresse IP, pour maintenir ladite adresse IPv6 et ladite adresse IPv4 capturées dans lesdits moyens de maintien d'informations de conversion d'adresse IP de manière à ce qu'elles correspondent l'une à l'autre, pour notifier audit terminal IPv4 ladite adresse IPv4, de manière similaire pour recevoir une demande d'une adresse IP pour un nom de domai-

ne du terminal IPv4 à partir du terminal IPv6, pour obtenir une adresse IPv4 en la demandant au serveur DNSv4, pour notifier audit terminal IPv6 ladite adresse IPv6 si l'adresse IPv6 correspondant à ladite adresse IPv4 est maintenue dans lesdits moyens de maintien d'informations de conversion d'adresse IP, pour capturer l'adresse IPv6 par des moyens de capture d'adresse IPv6 si l'adresse IPv6 correspondant à ladite adresse IPv4 n'est pas maintenue dans lesdits moyens de maintien d'informations de conversion d'adresse IP, pour maintenir ladite adresse IPv4 et ladite adresse IPv6 capturée dans lesdits moyens de maintien d'informations de conversion d'adresse IP de manière à ce qu'elles correspondent l'une à l'autre, et pour notifier audit terminal IPv6 ladite adresse IPv6.

6. Dispositif selon la revendication 5, comportant de plus des moyens d'adresse IPv6 pour capturer une adresse IPv6 à partir d'un serveur DHCPv6 dudit réseau IPv6.
7. Dispositif selon la revendication 5, dans lequel lesdits moyens de maintien d'informations de conversion d'adresse IP (15) suppriment une adresse qui ne fait pas l'objet d'une référence pendant un temps prédéterminé dans la correspondance de ladite adresse IPv6 et ladite adresse IPv4 maintenues et retournent l'adresse IPv4 supprimée audit serveur DHCPv4 (4) du réseau IPv4 (104).
8. Dispositif selon la revendication 5, comportant de plus des moyens de regroupement d'adresses IPv4 (16) pour regrouper une pluralité d'adresses IPv4, et dans lequel lesdits moyens de maintien d'informations de conversion d'adresse IP (15) capturent ladite pluralité d'adresses IPv4 provenant dudit serveur DHCPv4 (4) dudit réseau IPv4 (104) au moment de l'activation du dispositif, regroupent lesdites adresses IPv4 capturées dans lesdits moyens de regroupement d'adresses IPv4 (16), et capturent l'adresse IPv4 correspondant à l'adresse IPv6 dudit terminal IPv6 (5, 115) à partir desdits moyens de regroupement d'adresses IPv4 (16).
9. Dispositif selon la revendication 5, comportant de plus des moyens de serveur DHCPv4 (17) pour allouer dynamiquement l'adresse IPv4, et dans lequel lesdits moyens de serveur DHCPv4 (17) sont utilisés à la place dudit serveur DHCPv4 (4) dudit réseau IPv4 (104).

FIG. 1

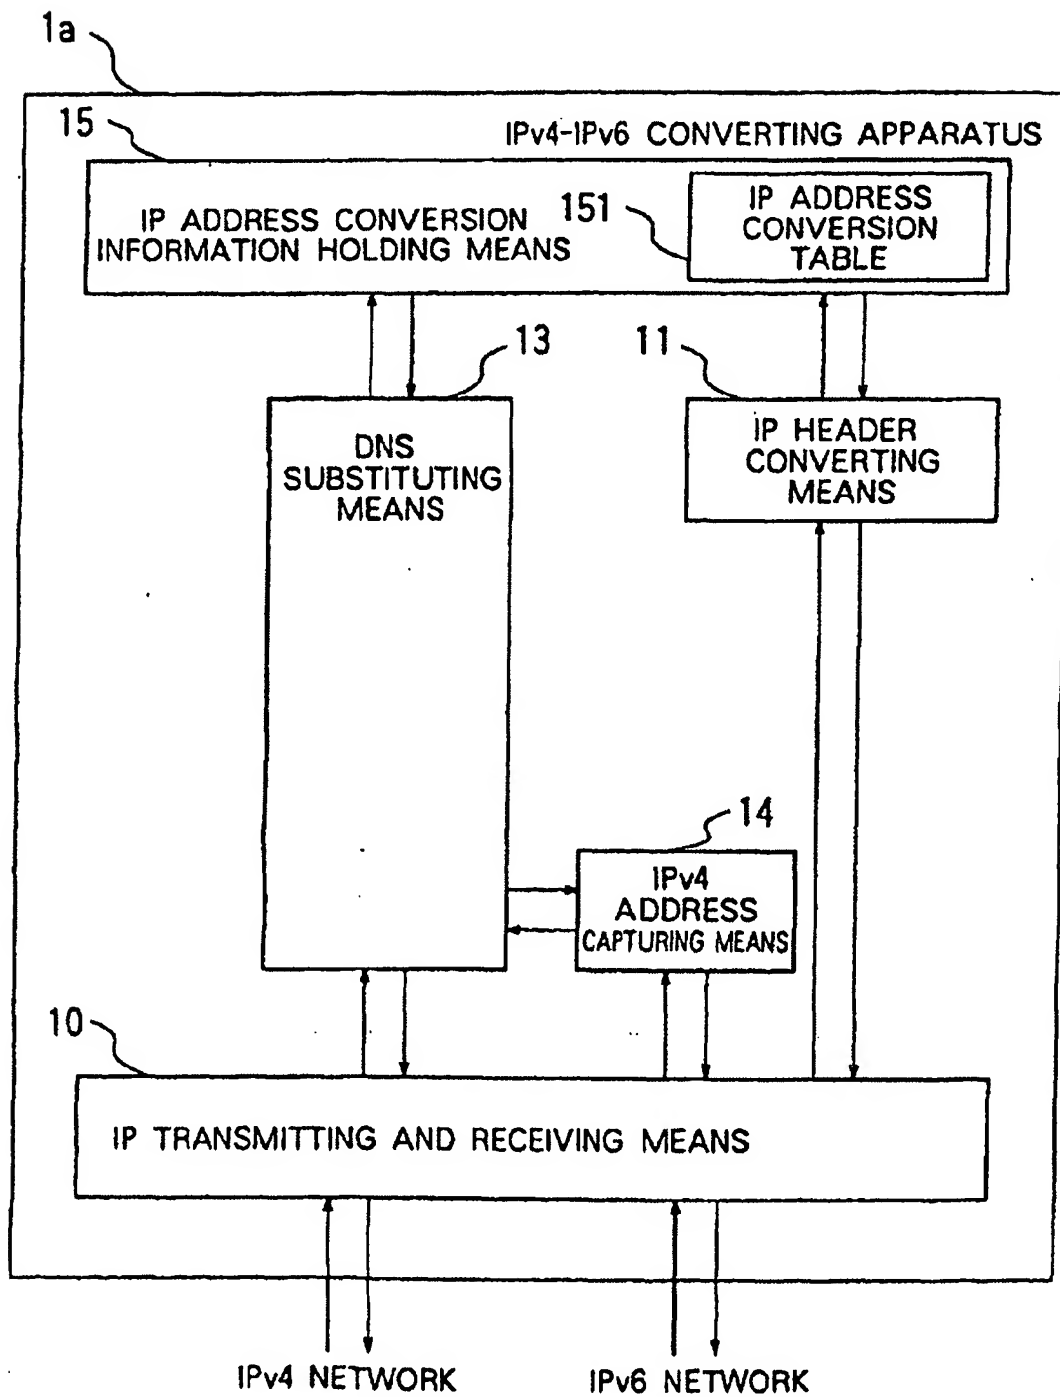


FIG. 2

ITEM NO.	IPv4 ADDRESS ALLOCATED TEMPORARILY TO TERMINAL IN IPv6 NETWORK	IPv6 ADDRESS OF TERMINAL IN IPv6 NETWORK
1	1 3 3 . 1 4 4 . 9 5 . 1	1 : : 1
2		
	-----	-----
n		

FIG. 3

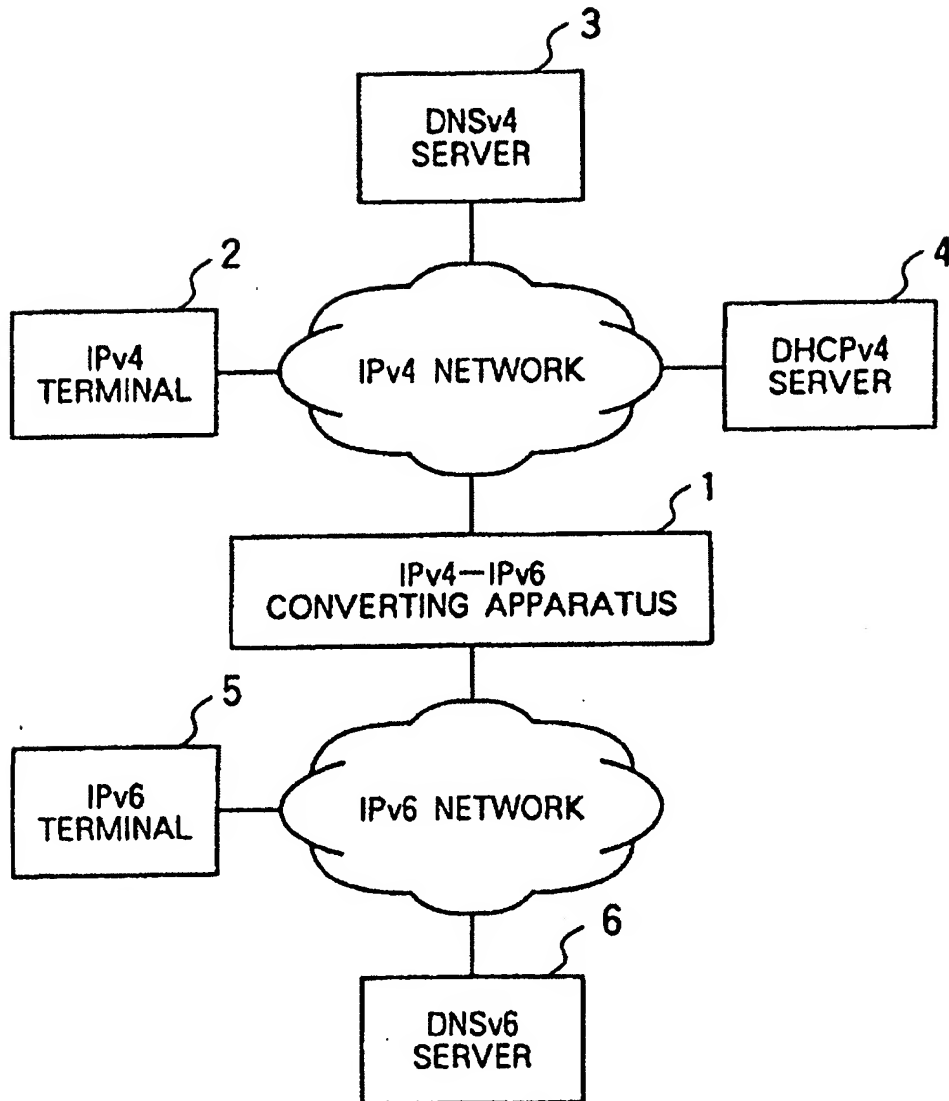


FIG. 4

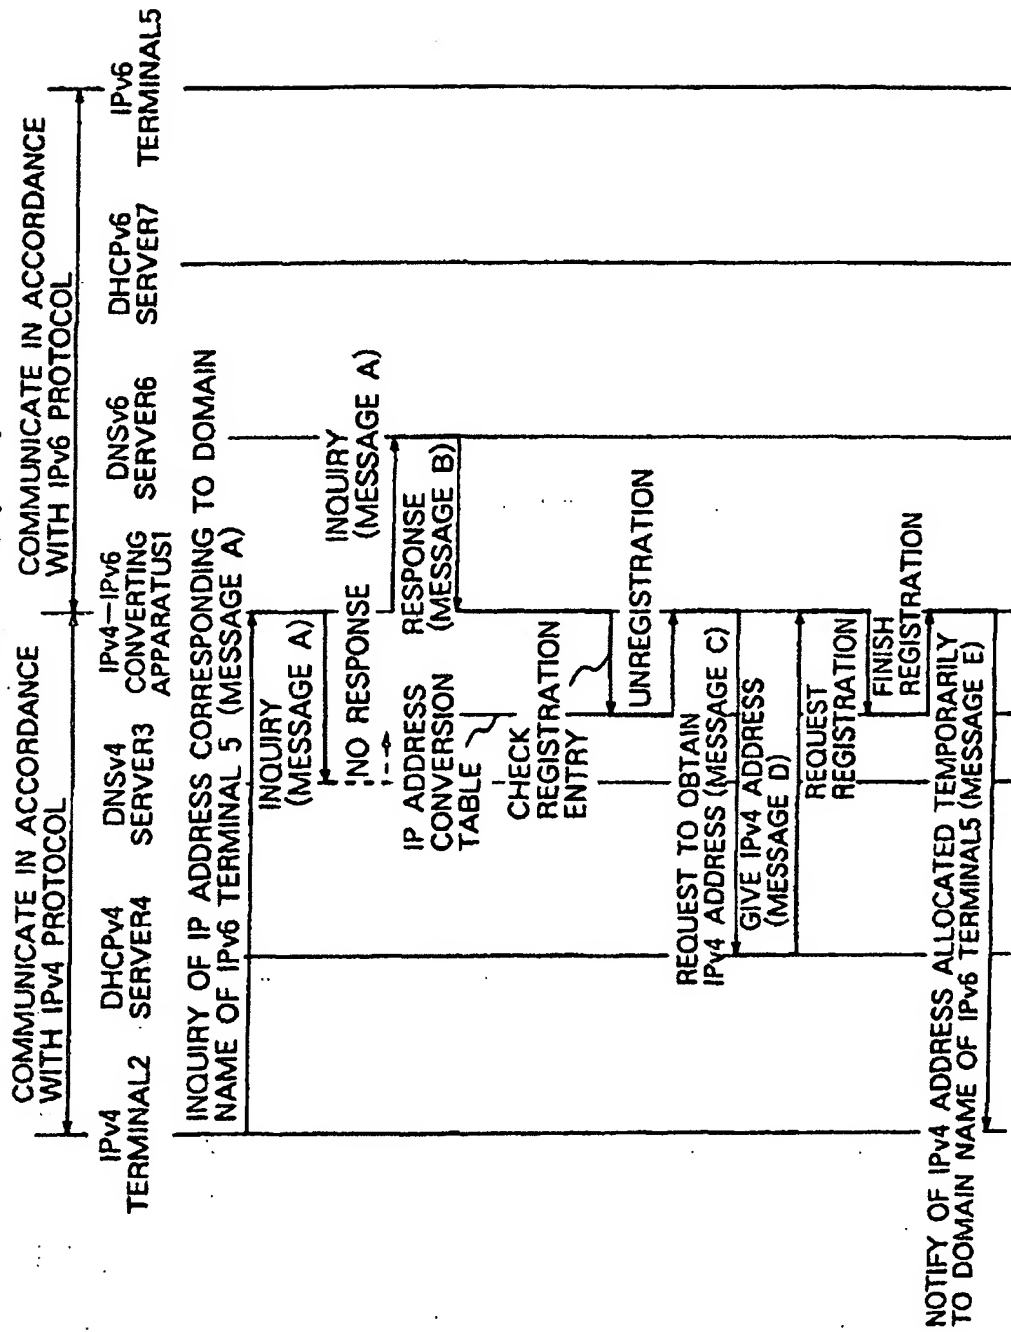


FIG. 5

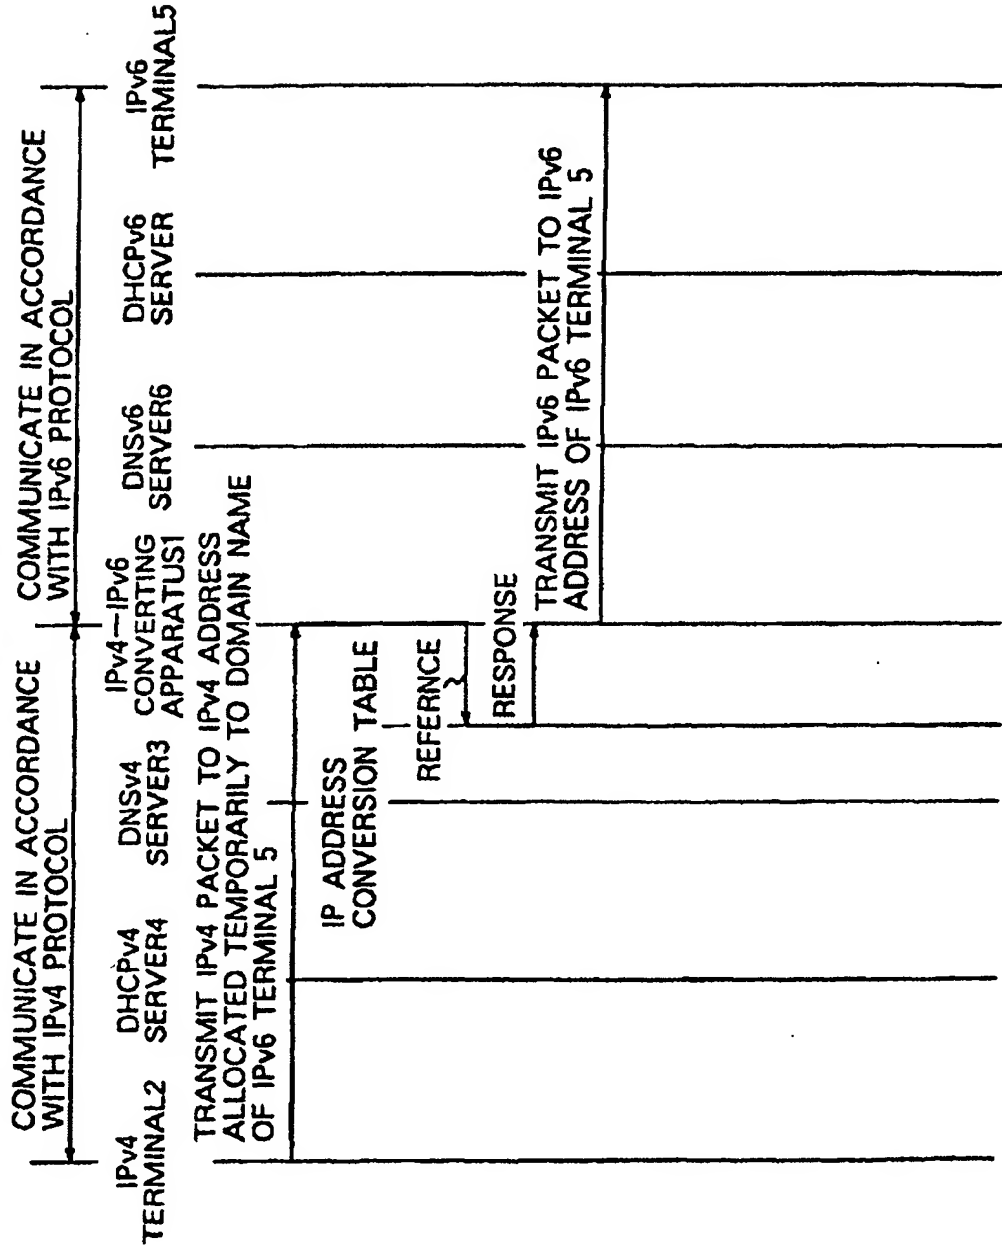
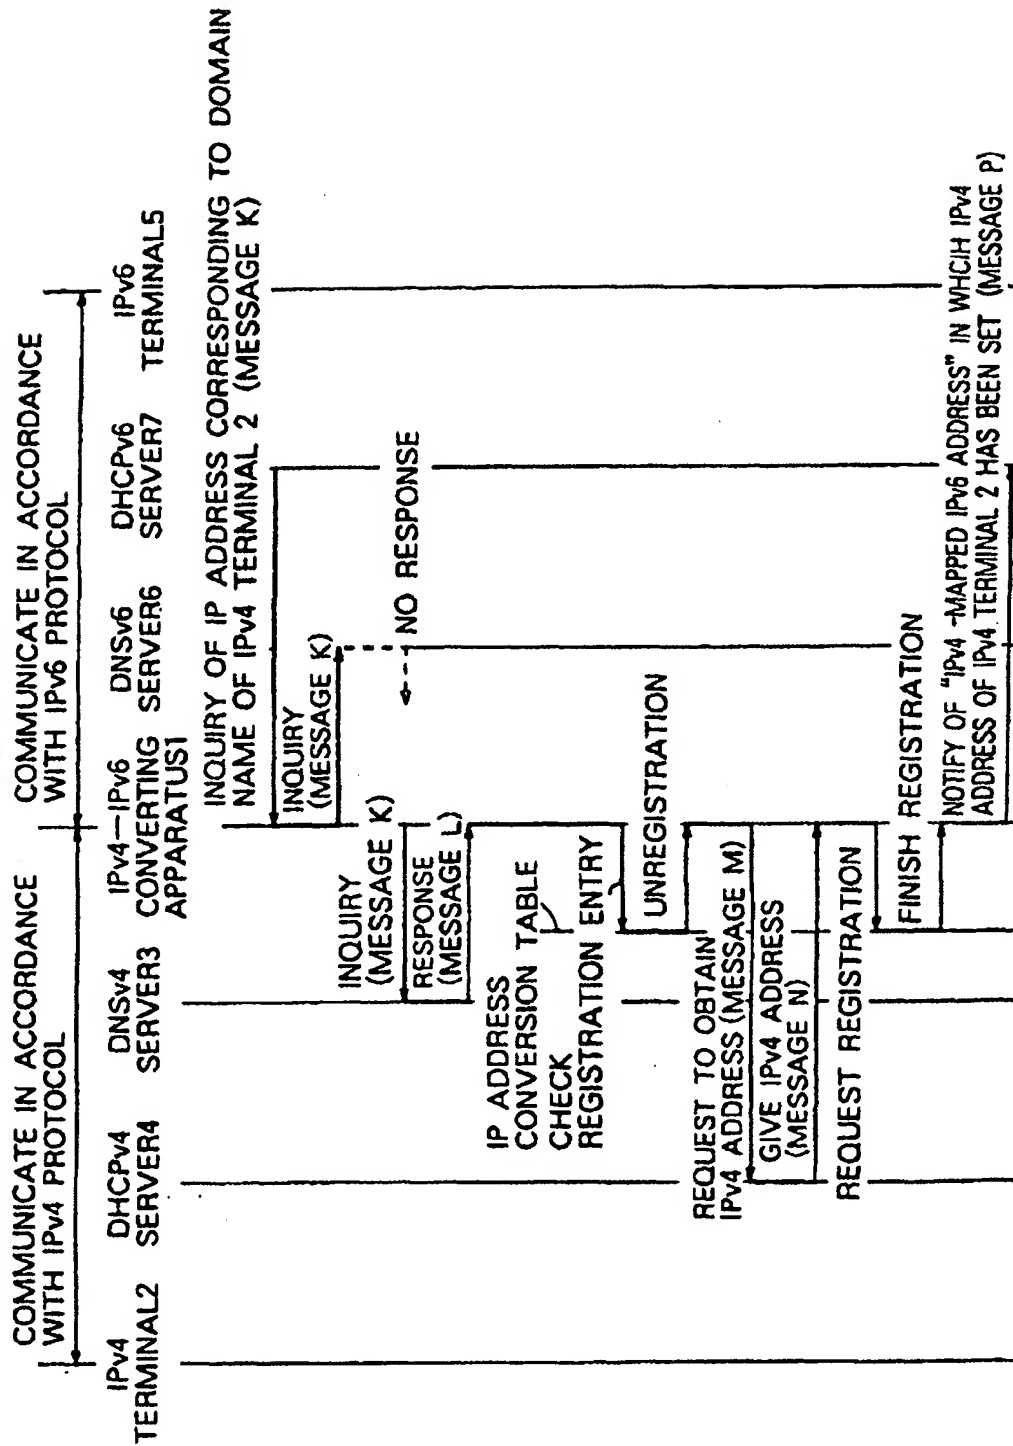
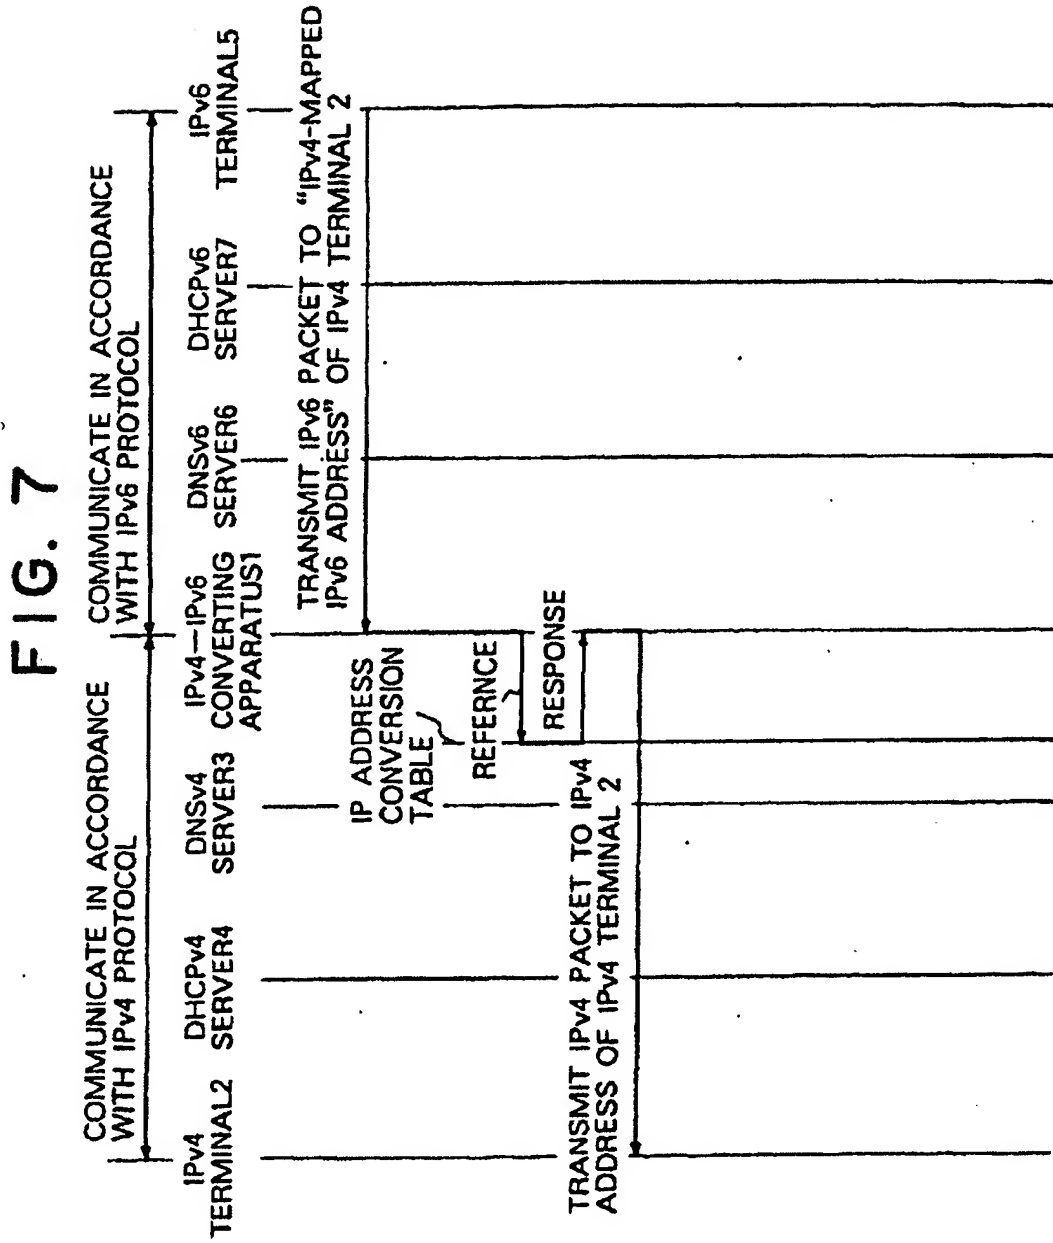


FIG. 6





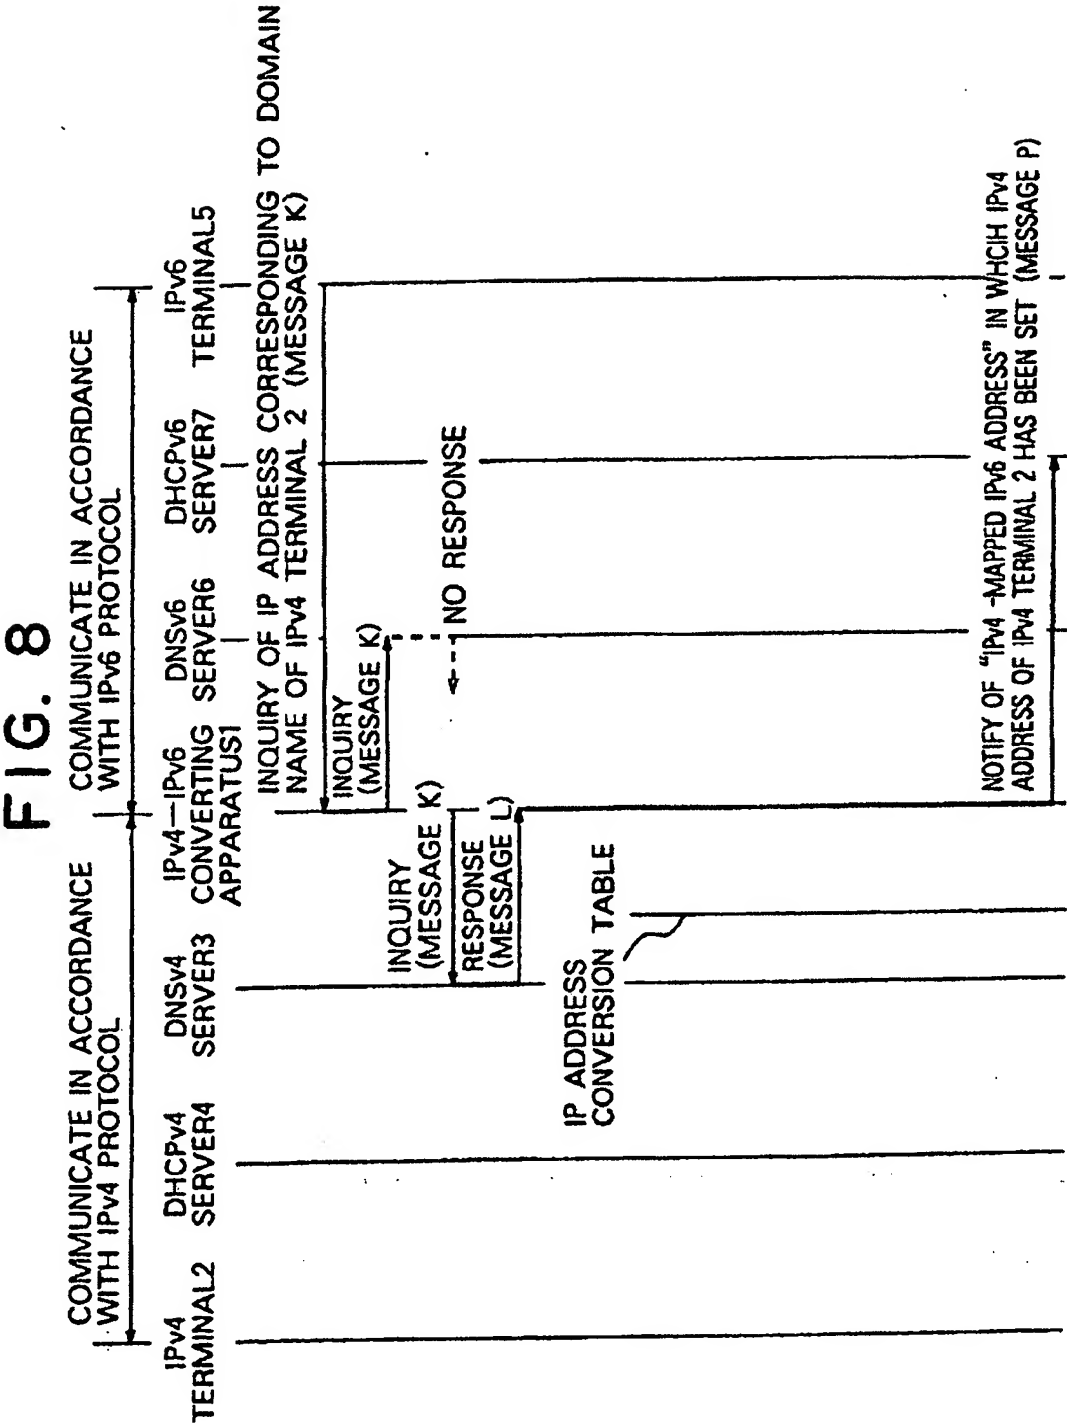


FIG. 9

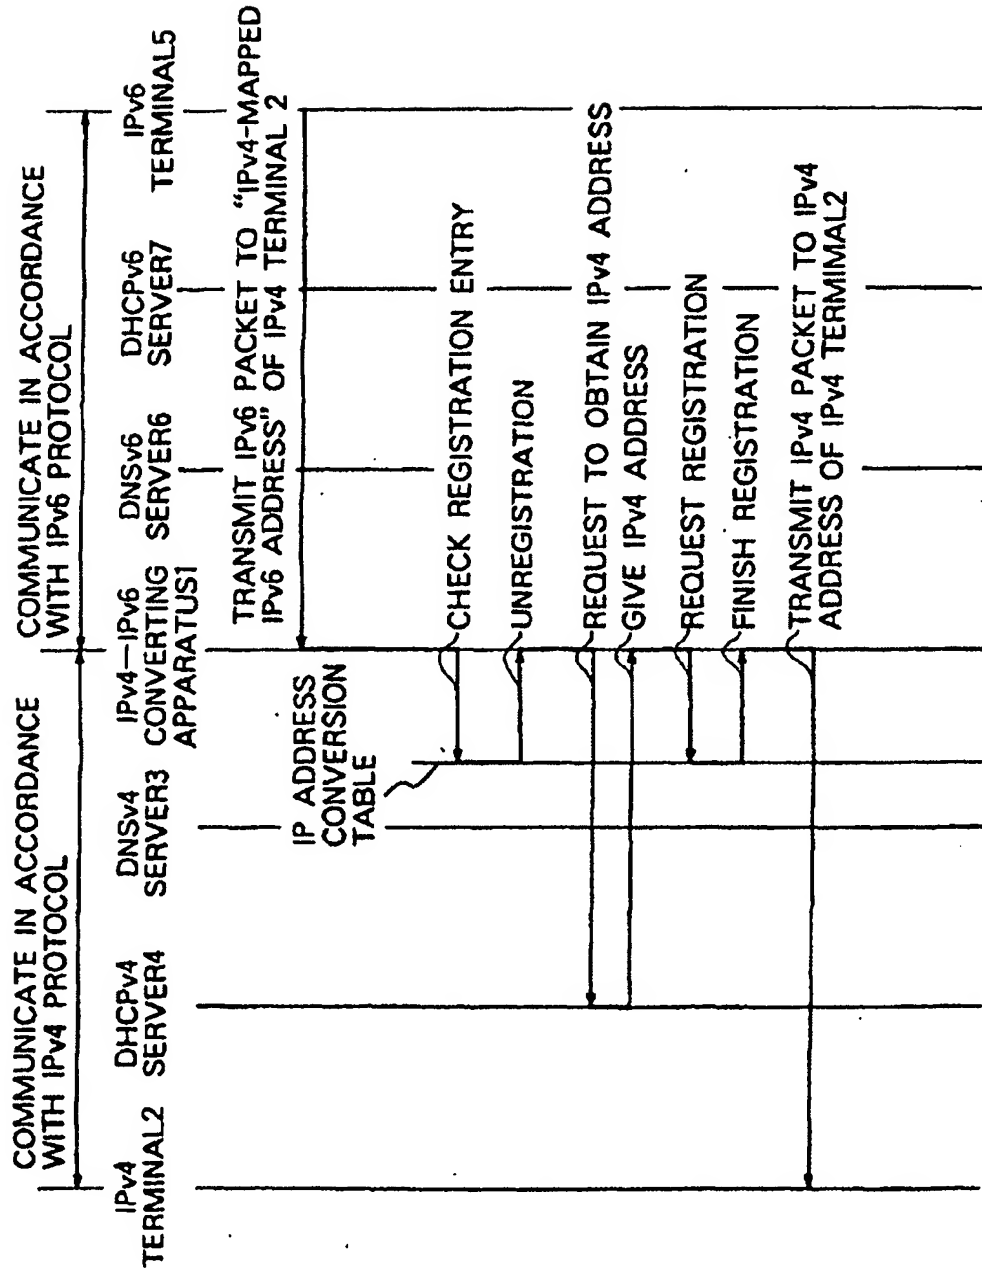


FIG. 10

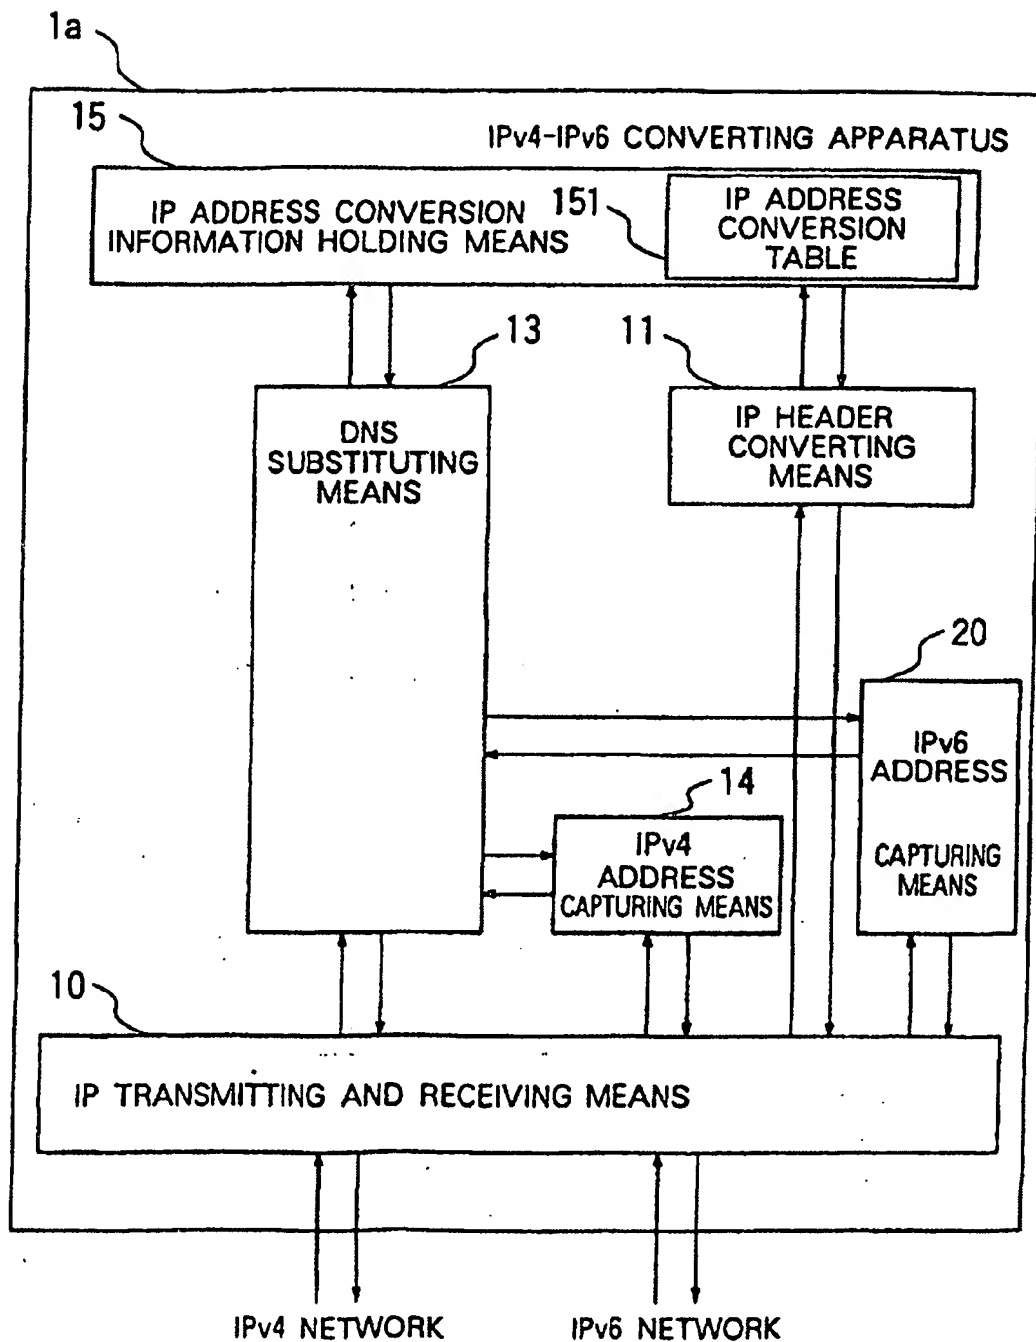
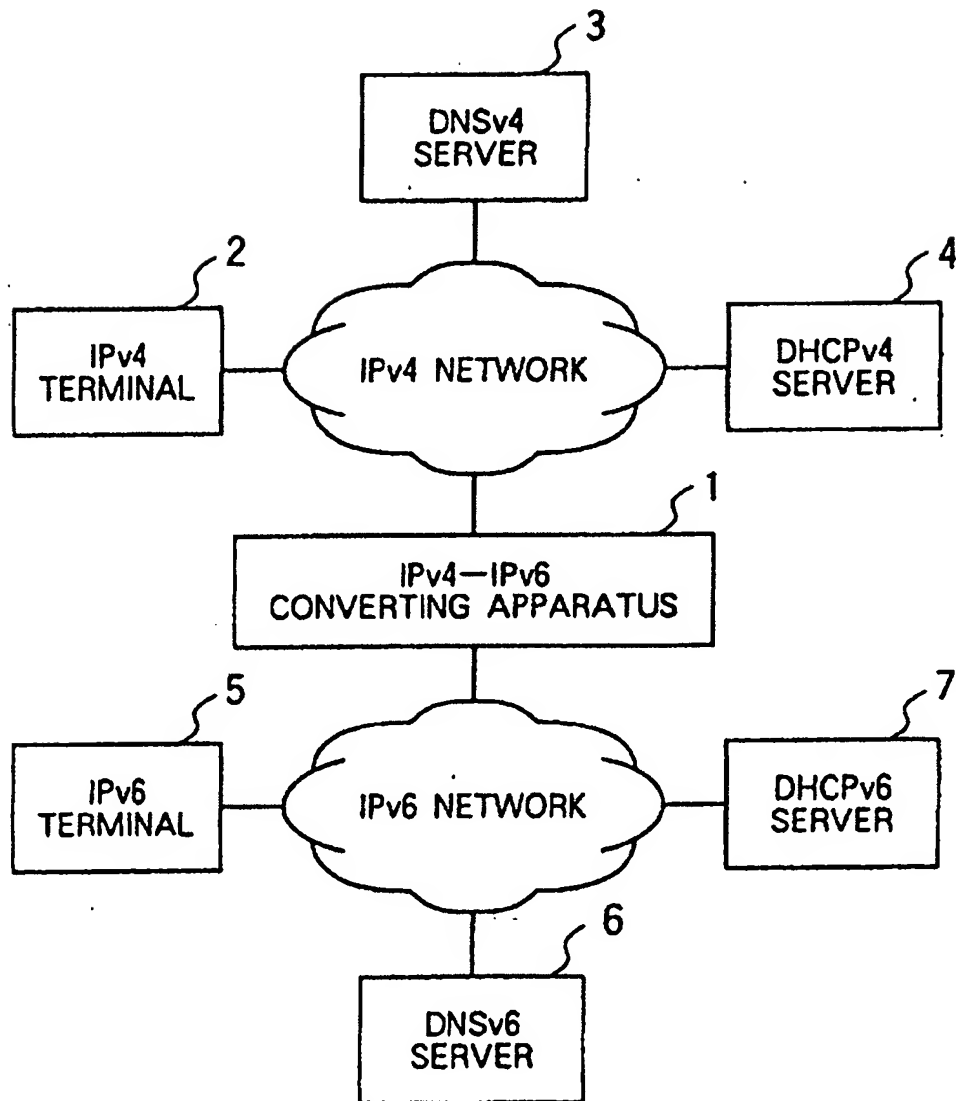


FIG. 11



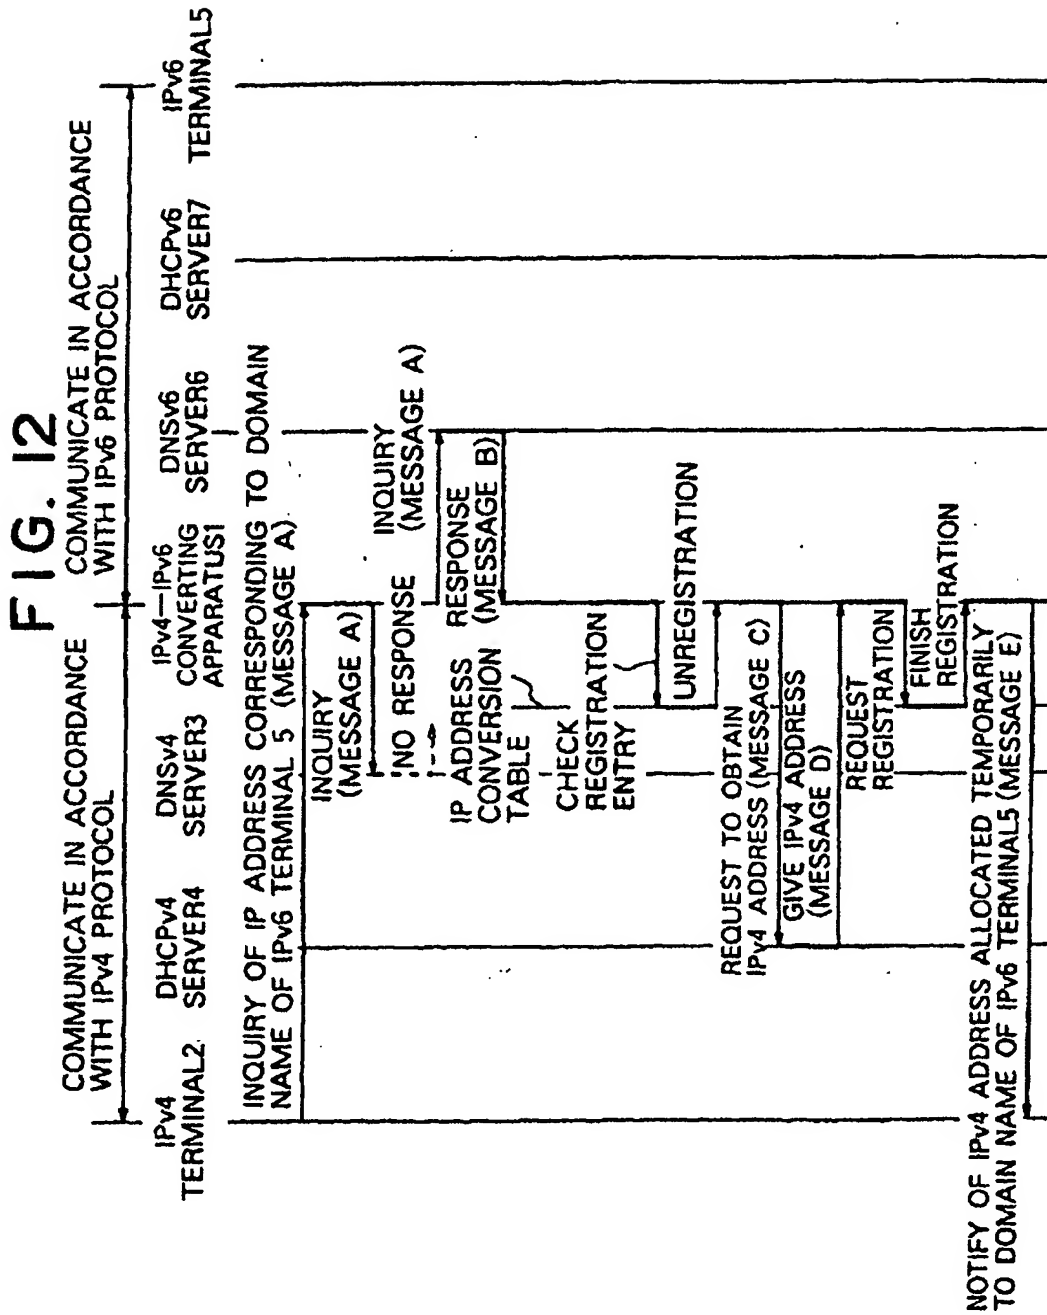


FIG. 13

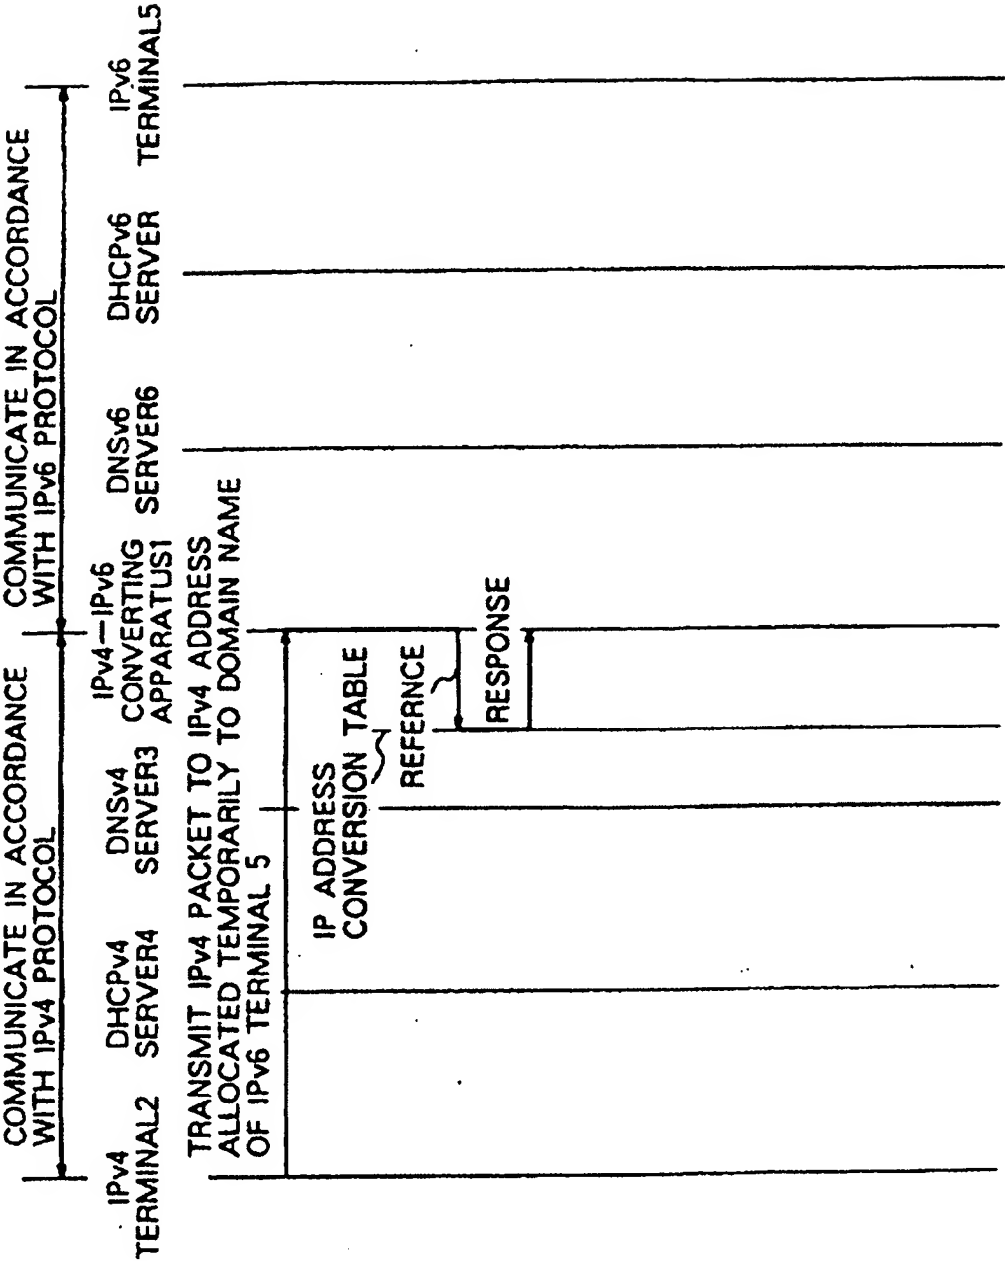


FIG. 14

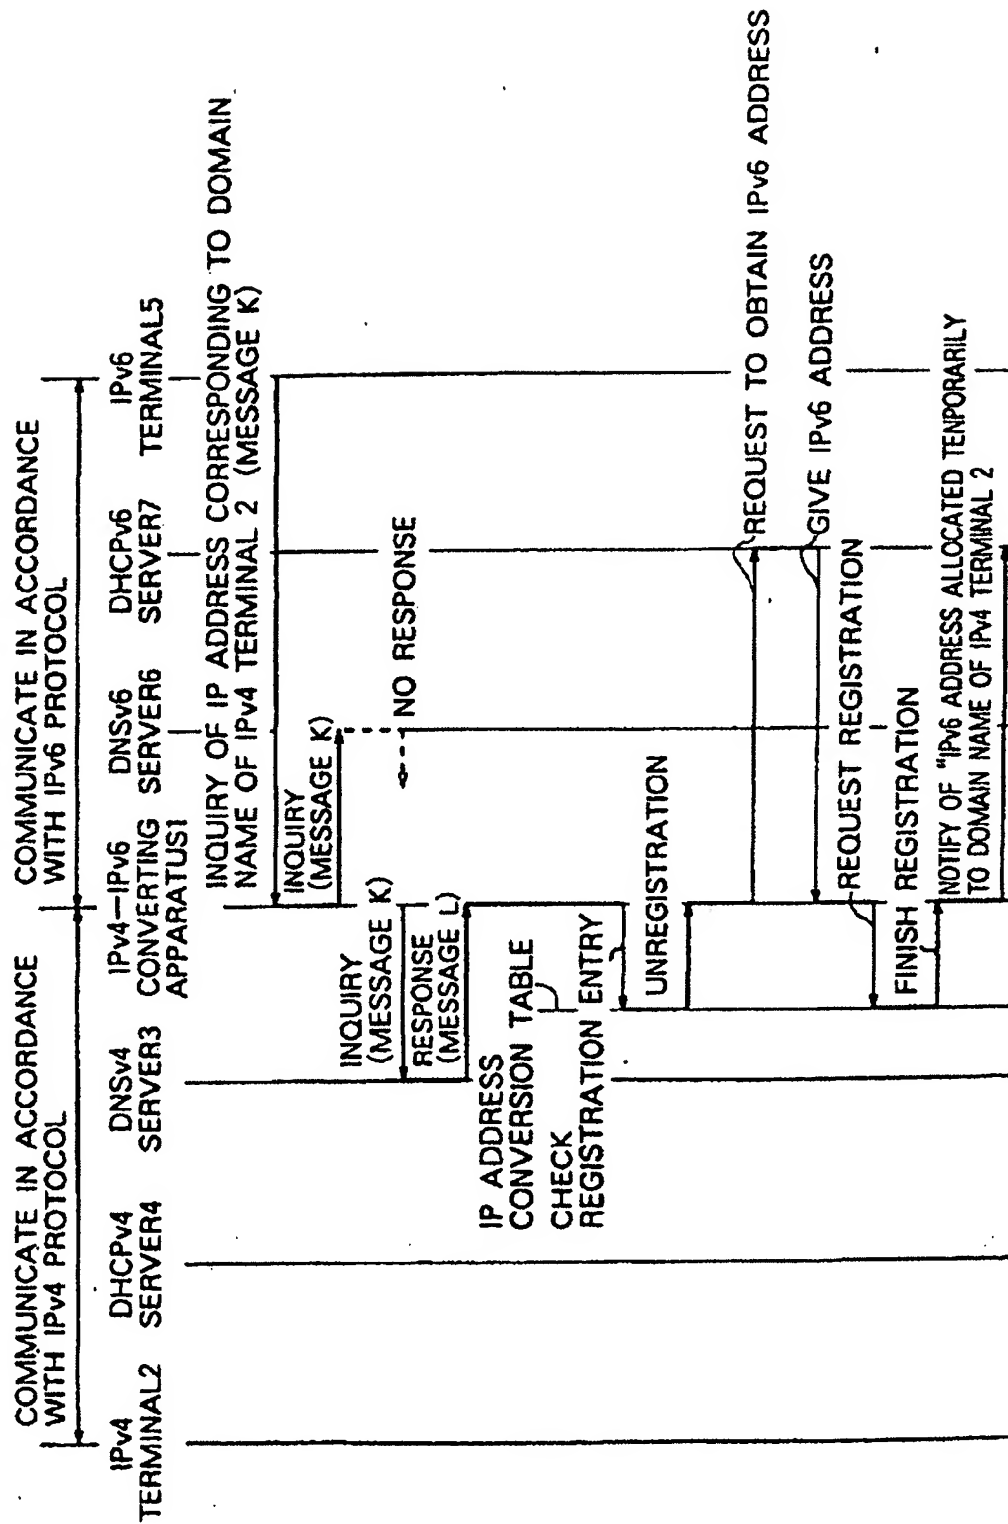


FIG. 15

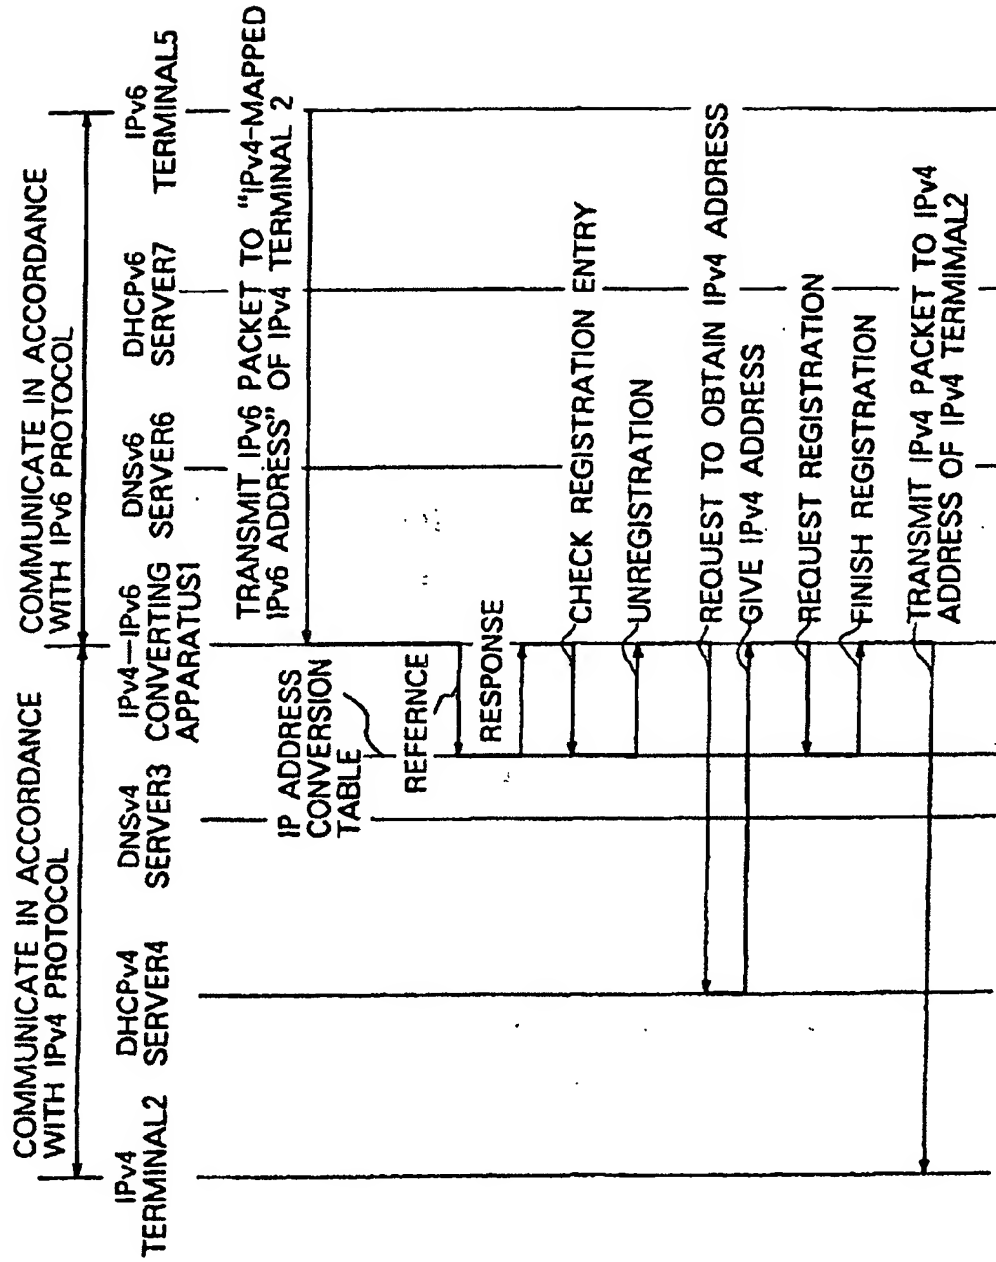


FIG. 16

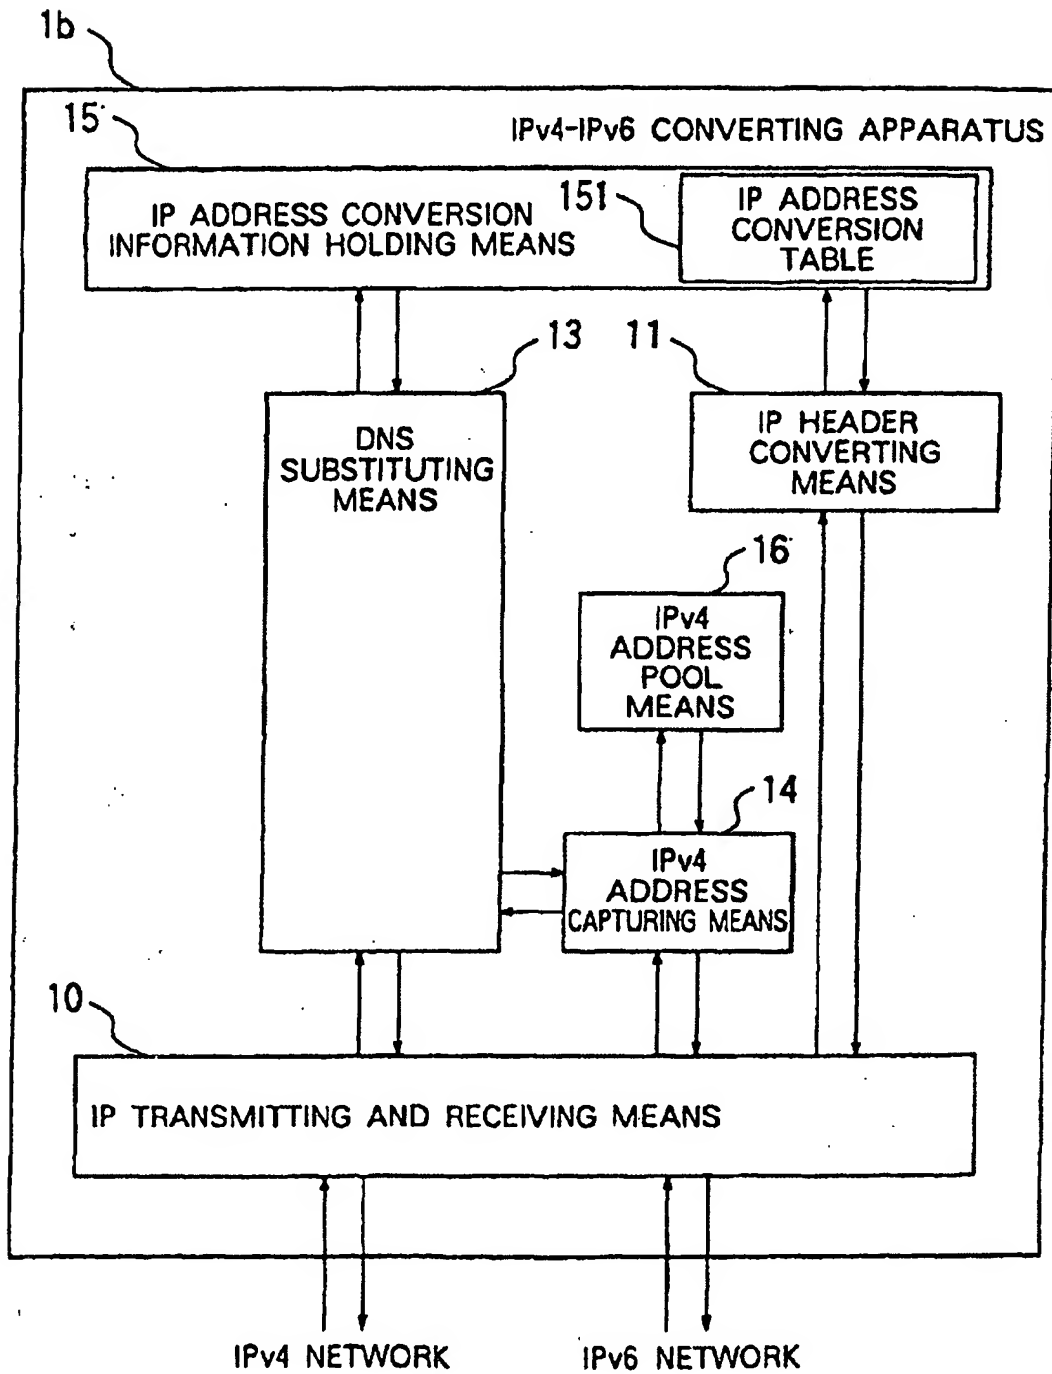


FIG. 17

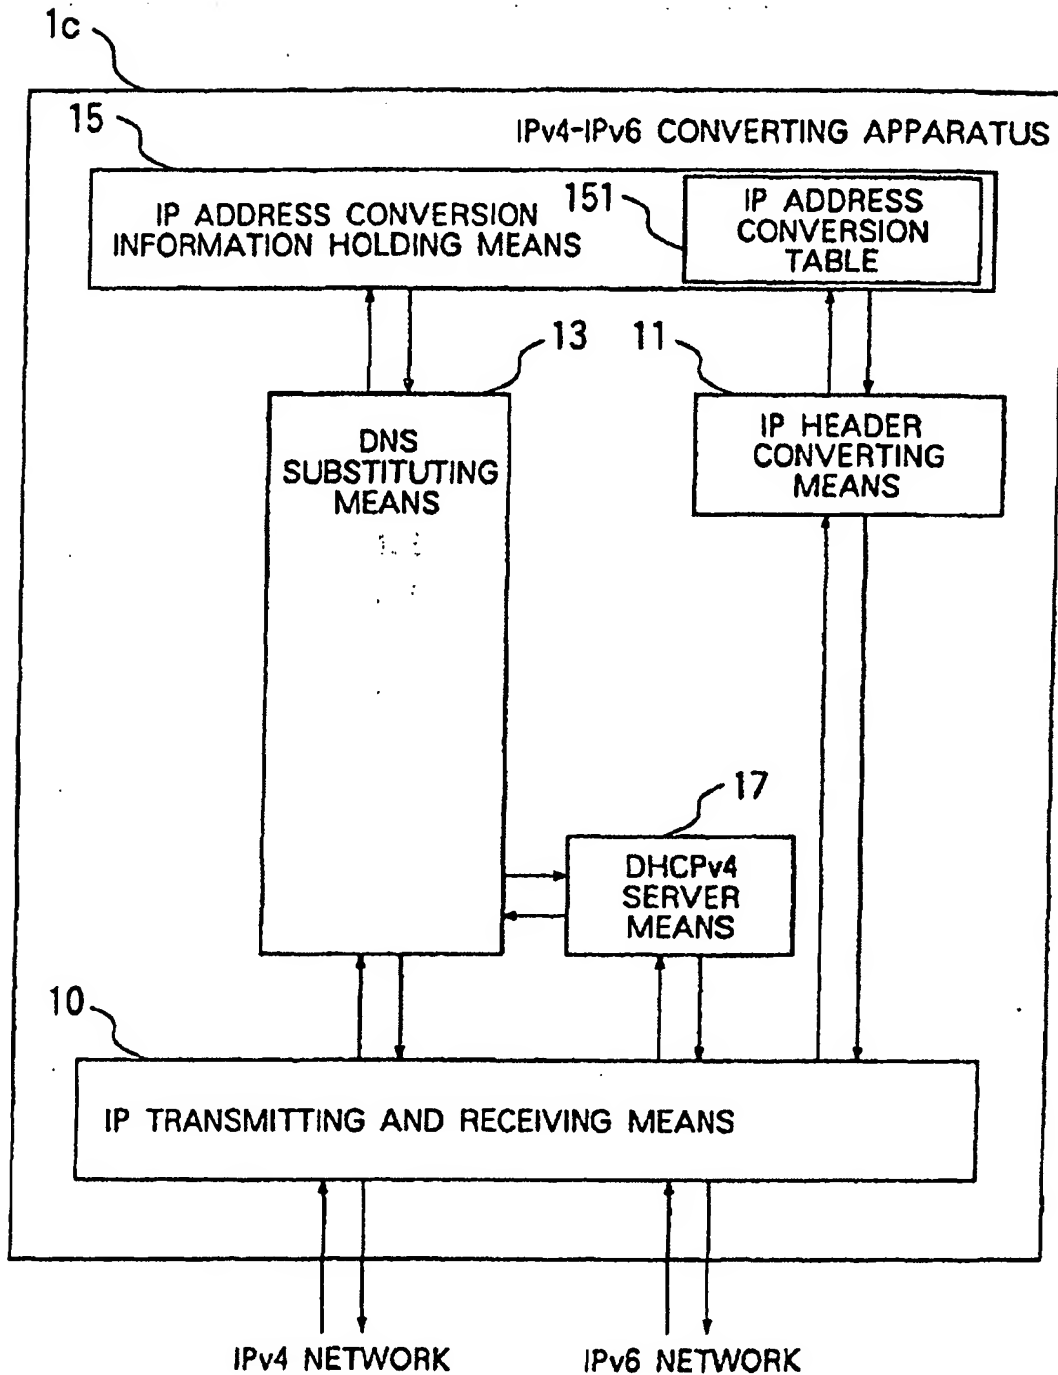


FIG. 18

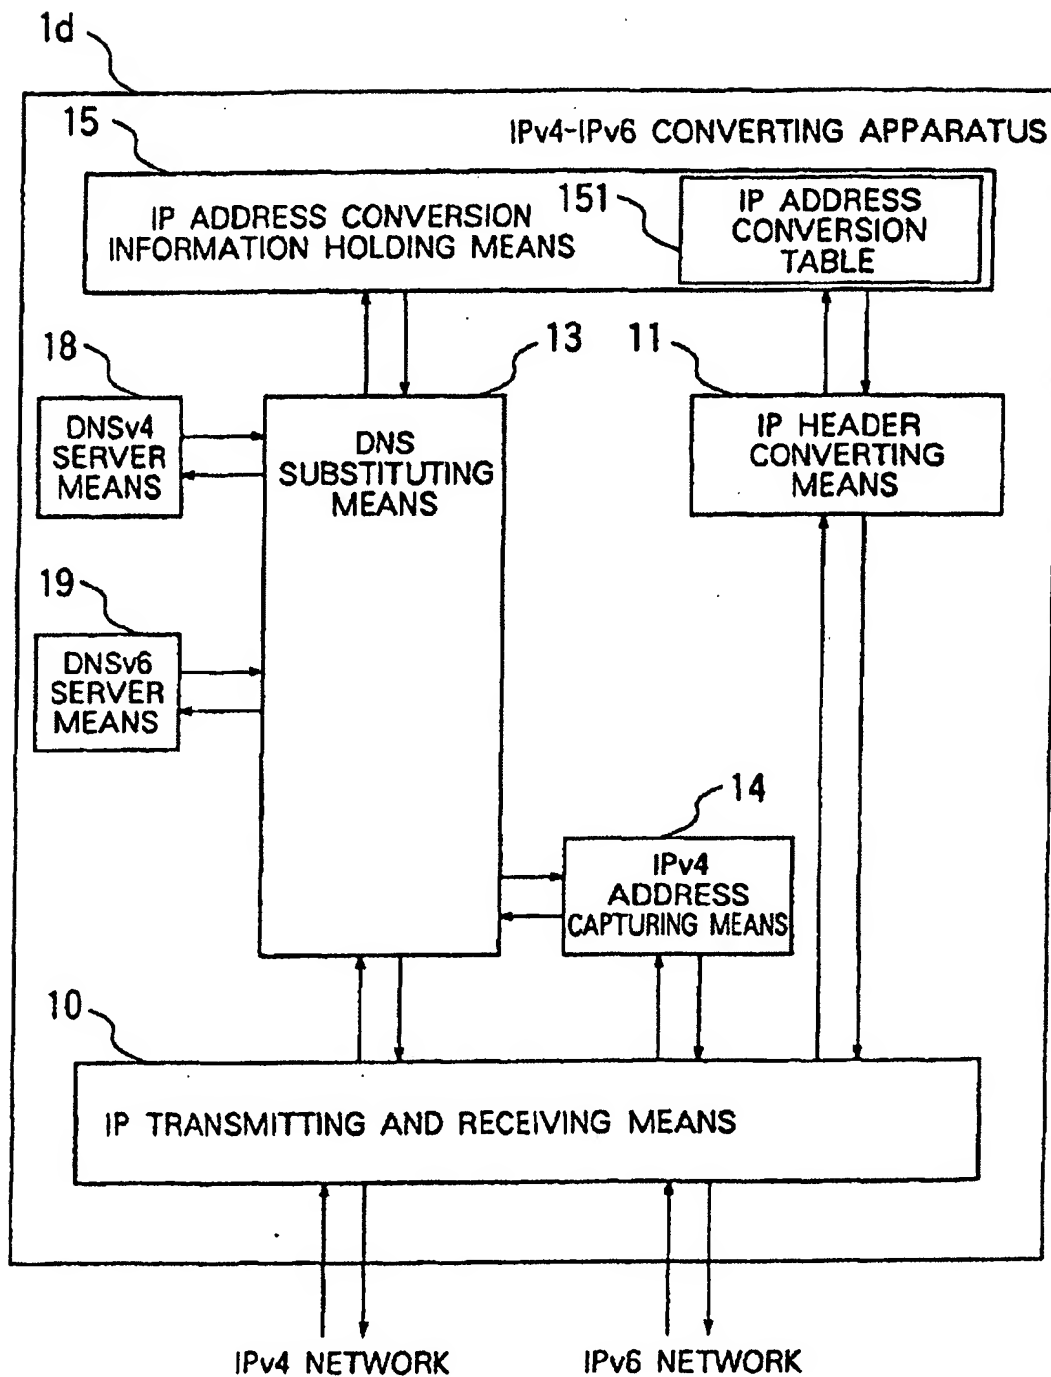


FIG. 19

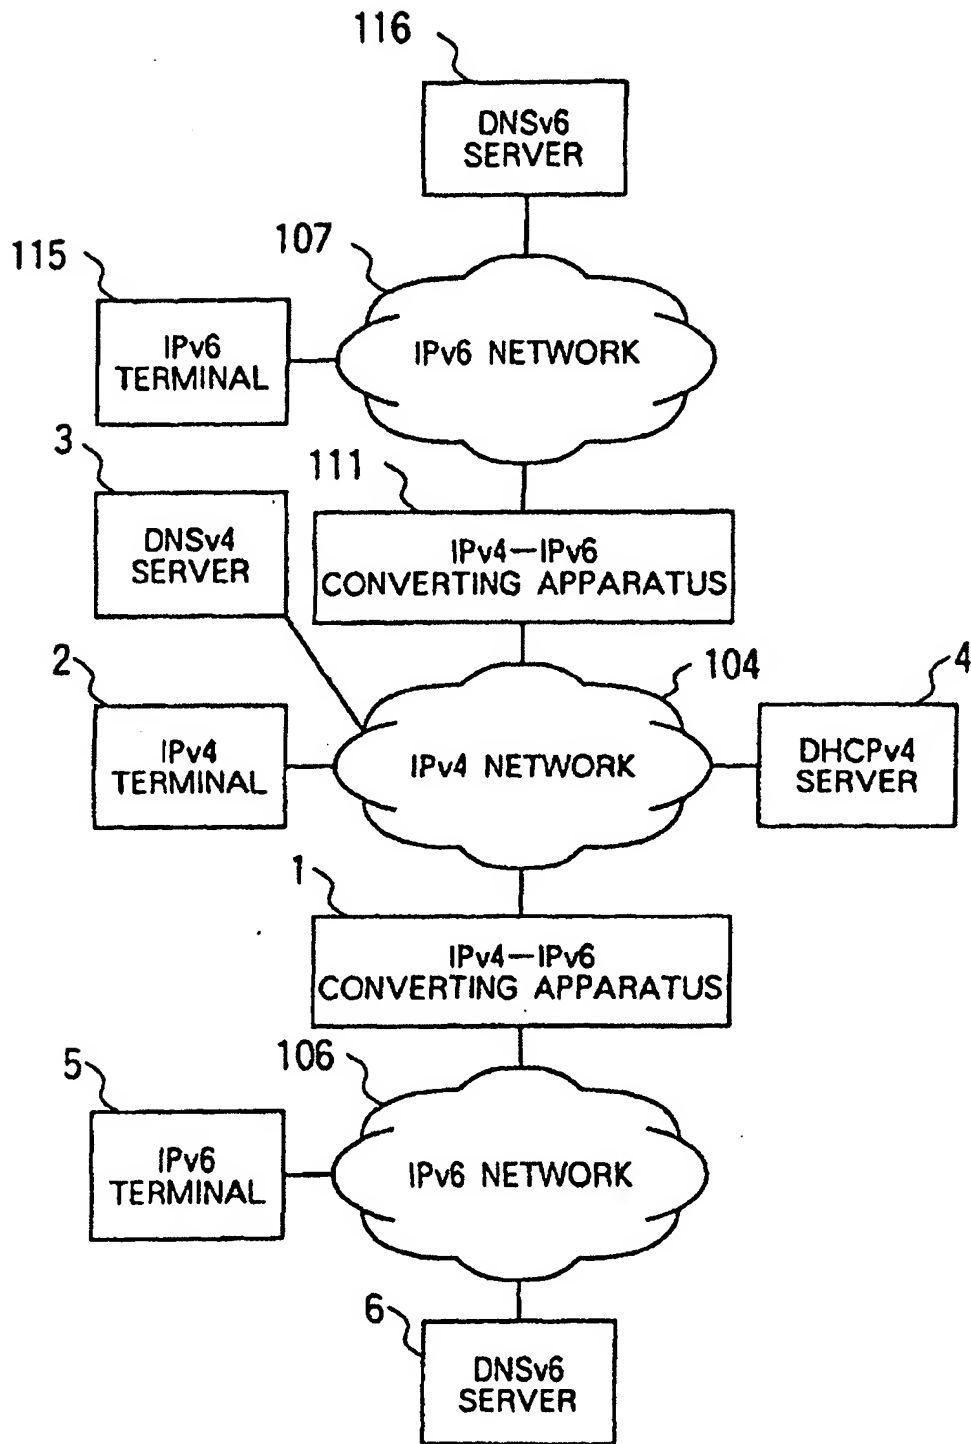


Fig. 20

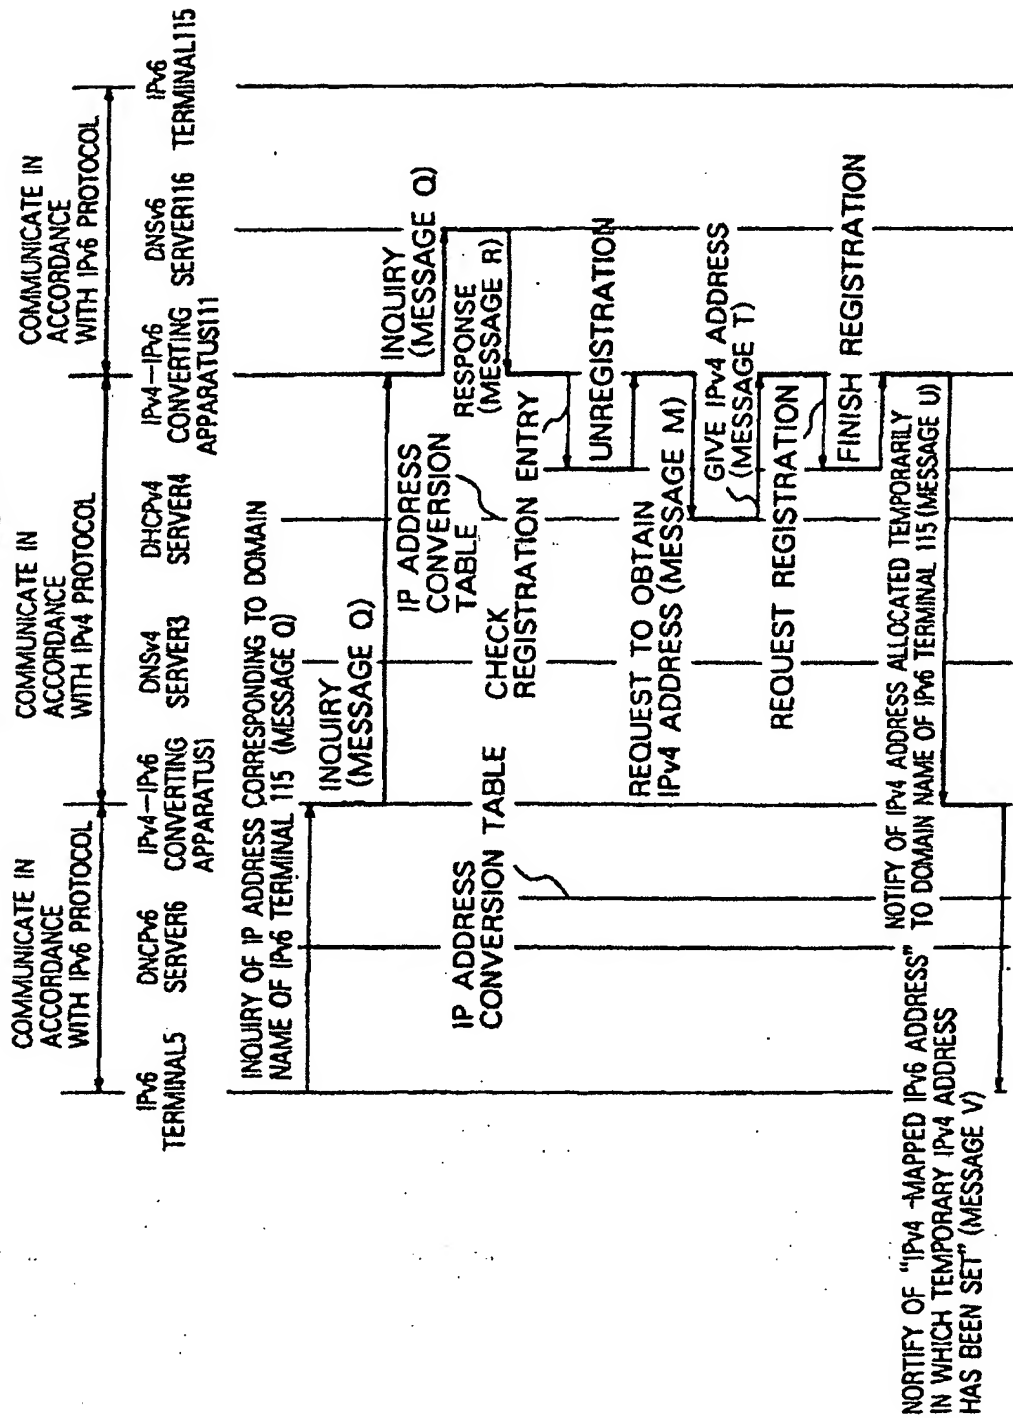


FIG. 21

